

*i*dea book

WALLS+FORMS

Store Fixturing | P.O.P. | Signage | Components | Showroom | Custom

custom P.O.P. DISPLAYS



With over a decade and a half of design and manufacturing experience, Walls+Forms is recognized for competitively priced, high quality display solutions. Whether you are a retailer, product manufacturer, OEM, contractor or distributor, you have the ability to choose an ensemble of fixtures crafted to your specifications...

PERIMETER Wall Systems



Walls+Forms™ panel systems offer value to quickly create perimeter skinning, partition walls and bump back walls. The system is modular enough to fit virtually any space.

MODULAR Slot-Fit COUNTERS



SlotFit is a user friendly method of Ready-To-Assemble. Unlike construction methods of traditional counters, our counters can be shipped "knock-down" to greatly reduce freight costs and damage.

CUSTOM Fixturing SOLUTIONS



Walls+Forms, Inc. now designs and manufactures retail fixtures, point-of-purchase displays, exhibit systems, extrusion components, signage systems and more....

DISPLAY Components & ACCESSORIES

STANDARD DISPLAYS



SIGNAGE PRODUCTS



CUSTOM DISPLAYS



PRIVACY ROOMS

All component systems are designed with modularity and flexibility in mind... If you need a specific display or particular assemblies and parts, we offer a diversified range of display products, components & accessories...

Component Products

New Concept In Display Engineering

Whether you are a user and/or producer of displays and graphics, Walls+Forms, Inc. has a wide variety of products and capabilities that can meet your needs. We have been designing and manufacturing display components and modular displays for the retail fixture, point of purchase, and signage/graphic and exhibit industries for over fifteen years.

Our products can be seen throughout the United States, Canada, Mexico and Europe, and are utilized by a broad base of industries including gift, hobby, kitchen/bath, lawn/garden, telecommunication and furniture.

Some of our unique and proprietary products and accessories include:


- + **CornerForms™** - panel connectors
- + **EuroSign™** - graphic sign systems
- + **Displatix™** - module floor and exhibit system
- + **Polymer - "Plastic" Slatwall**
- + **Moldings** - aluminum, plastic, and wood and More

In addition to our component products, we offer custom store fixtures and retail/POP display services. We can work with you to develop a display utilizing our "component Products" or create a custom design to fit any budget requirement. Our designers can do the research required to develop displays that meet not only your needs but also your company image and message. We can deliver designs indented you through sketches, photo-realistic renderings and video animations.


Excellence in product engineering continues to define the difference between good design and mere idle speculation. Our engineering department uses the latest in CAD software to transfer the design intent of conceptual art into a working physical object. In fact, because of the relationship of design to engineering, all conceptual art present is can be manufactured.

Walls + Forms, Inc. is committed to providing you the highest quality products, design and engineering services that rises above the status quo. Whether it is conceptual design, engineering, component manufacturing or display fabrication,

Walls+Forms™ is the "New Concept in Display Engineering."

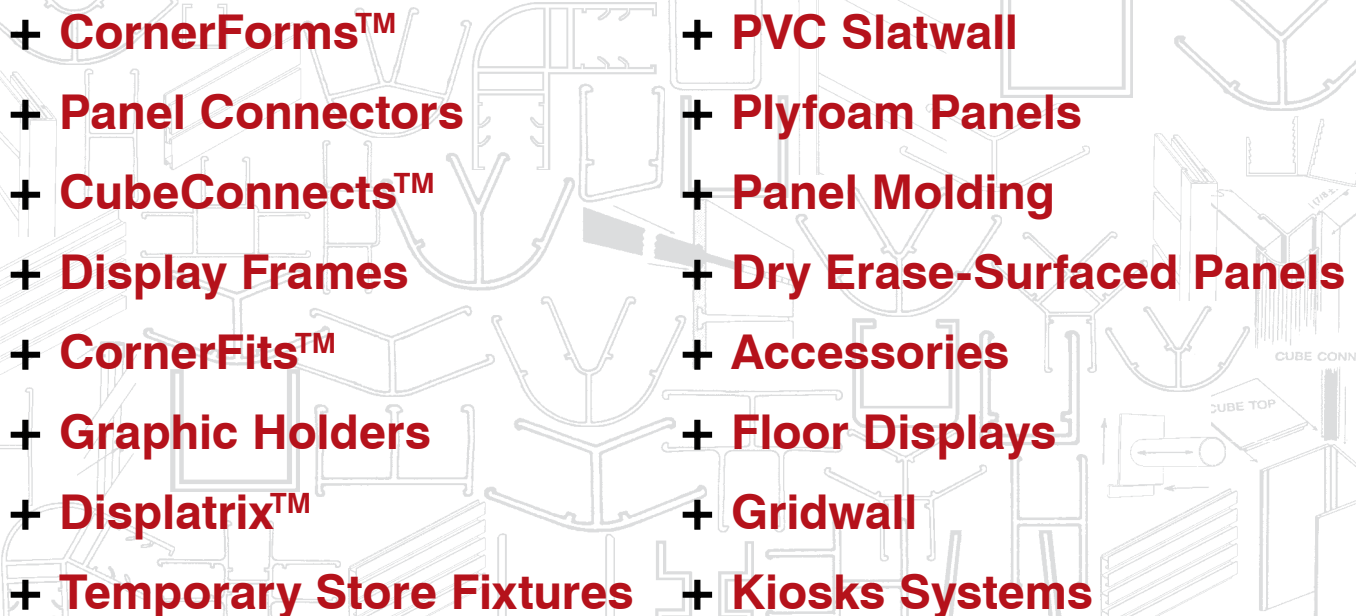- 
- + **CornerForms™**
 - + **Panel Connectors**
 - + **CubeConnects™**
 - + **Display Frames**
 - + **CornerFits™**
 - + **Graphic Holders**
 - + **Displatix™**
 - + **Temporary Store Fixtures**
 - + **PVC Slatwall**
 - + **Plyfoam Panels**
 - + **Panel Molding**
 - + **Dry Erase-Surfaced Panels**
 - + **Accessories**
 - + **Floor Displays**
 - + **Gridwall**
 - + **Kiosks Systems**

+ PANEL PROFILES




















CornerForms™ is the patented two part fastening system that can be used to construct perimeter walls, fitting room, floor fixtures, part time counters, trade show booth and hundred of other construction applications. CornerForms™ and its associated edge cap component naturally reinforces the panel. On site assembly is extremely simple. CornerForms™ permits lasting assembly, no sliding is necessary. Shallow ceiling heights do not obstruct most assemblies. By design CornerForms™ permits field cutting. The Edge Cap Channel, Kerf Cap, or Grid Adapter in PVC or aluminum, can be removed for panel alteration and reapplied for installation. For extra strength and panel support, please specify aluminum #4975 Edge Cap. Gridwall or SlatGrid application specify Grid Adapter #2687. (see instructions)

New Colors!

CornerForms™ are available in new contemporary colors*. In addition to our standard white, grey, almond, black, all 1/4", 1/2" and 3/4" profiles are stocked in red, yellow, blue sand granite, green, grey granite, land serengeti (Hard Rock Maple). Low minimums, quick availability and satisfaction guaranteed.










Custom Colors! To match or compliment your next design, we will "color match" our profiles to your paint, laminate or PMS specifications. Minimums may apply.

TM




 30 DEGREE 3177	 45 DEGREE 3433	 60 DEGREE 2859	 90 DEGREE 2516	 120 DEGREE 3187	
 4-WAY 2844	 Y CONNECTOR 3169	 Y-90 CONNECTOR 3259	 2926 *180° *Accepts 1" X 1" tubing that may be	 *T CONNECTORS 2986 *Accepts 1" X 1" tubing that may be	 *SHARP 90 2005 *Dimensionally similar to 2700 "T" Connectors
 135 DEGREE 2600	 180DEGREE 2598	 FINISHED ENDCAP 2810	 DOUBLE FINISHED END 3563	 *ANGLE FINISH END 3181	 T CONNECTOR 2700


• CornerForms™ assembles 3/4", 1/2", and 1/4" panels • Standard Length: 96" • Standard Colors: Matte Black, Designer White, Dove Gray, Natural Almond, Liberty Red. • Custom colors and lengths are available. Minimums may apply and these minimums may vary. 50% deposit required for all customs orders. • Standard CornerForms™ units are shipped with the appropriate number of edge-caps.; For Example: a 90 degree CornerForms™ comes with two edge-caps, a Y-Connector comes with three edge-caps. The standard edge-caps will be either the #2525 edge-cap for 3/4" panels or the #3858 for those panels that may be slightly larger than 3/4" due to surface cladding of HPL, fabric etc.

1/2" CornerForms™


								
45 DEGREE 3773	60 DEGREE 3714	90 DEGREE 3723	120 DEGREE 3979	135 DEGREE 3724	3725 180 DEGREE	FINISHED END 3774	T-CONNECTOR 3750	EDGE CAP 3716

1/4" CornerForms™


		
60 DEGREE 2200	90 DEGREE 2281	EDGE CAP 2193

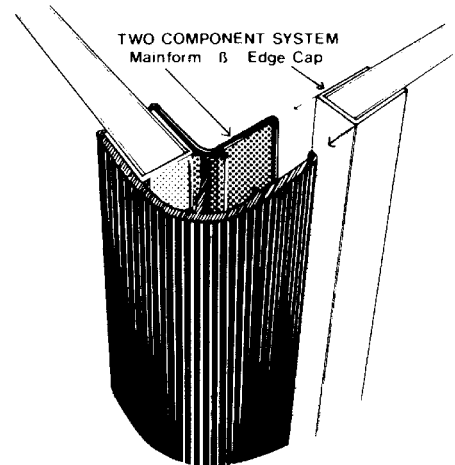


Clip CornerForms™



60° Angle - 2963
 Made of commercial grade styrene
 96" Lengths
 Colors: White, Black, Grey, & Almond
 Endcap 7525, 96" PVC material

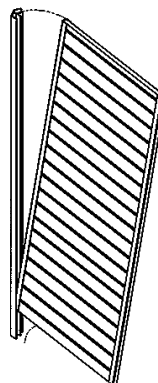



Clip CornerForms™ is a new "hybrid" design, that combines the smaller size of the CubeConnect profile, and two-part concept of the CornerForms™. Dimensionally smaller than our traditional CornerForms™, the Clip profile is designed to assemble 3/4" thick panels easily and quickly. Now smaller or lightweight promotional displays such as, floor fixtures, backdrops and graphic panels can be assembled in a snap.

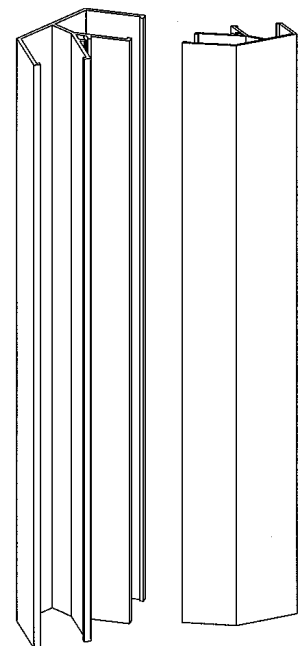










+ PANEL PROFILES

CornerForms™ Angle and Growth Allowances

Each CornerForms Angle is designed for optimum function in panel connection. The type, size and angle of each profile must be considered when allowing "distance" between center to center of each profile. All profile information is available by request from customer service and/or engineering departments.

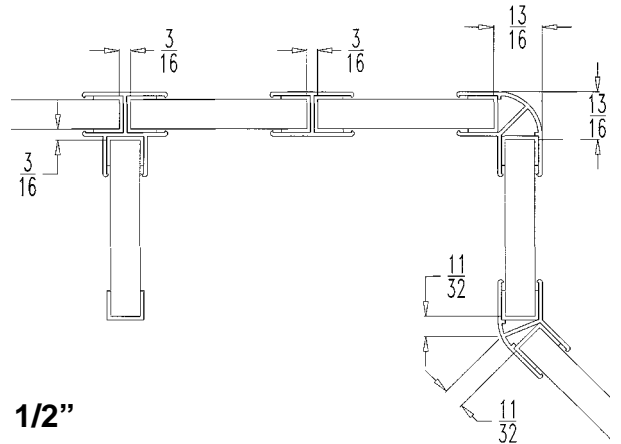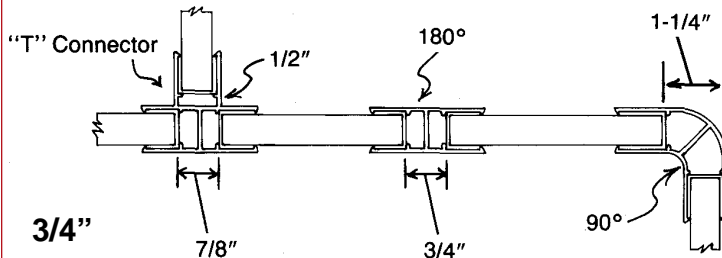


3/4" CornerForms "Clear" Dimensions

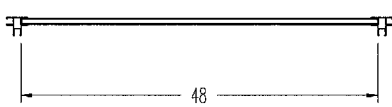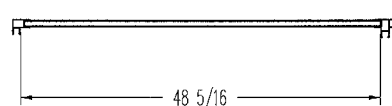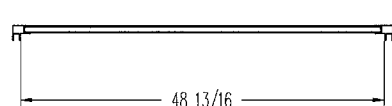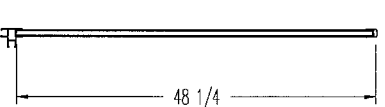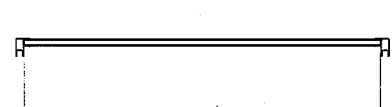
90°			"T" Connector
90°			"T" Connector
Finished End			Sharp 90°
"T" Connector			Sharp 90°
Finished End			

All dimension calculated off a 48" wide panel

All CornerForms™, CubeConnects™ and CornerFits™ are named by its inside angle based on 180 straight

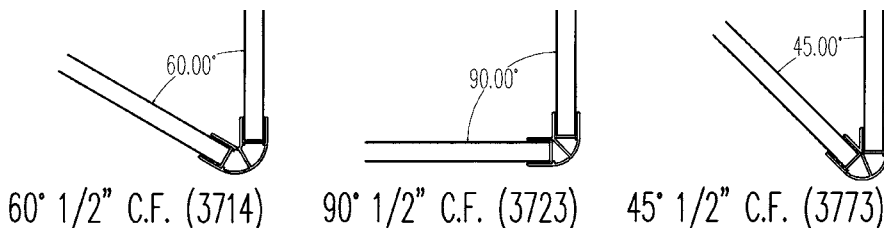


Finish End Cap overall width is 118"

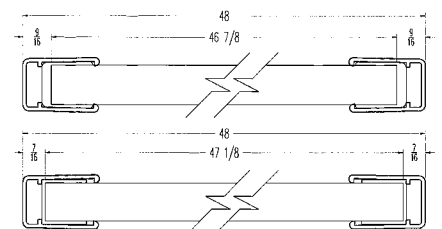

ASSEMBLY INSTRUCTIONS

ASSEMBLY STEP 1

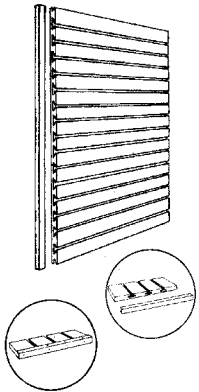

Applying edge Cap channel to vertical edge of panel.

WOOD SUBSTRATE: Use edge cap #2525 on panels 3/4" thick; 7/8" panels use #3858. Place plastic edge over panel's edge, insert a 5/8" chisel point staple on two or three sides (edge-front-back) 6" on center starting 1/2" from the top. For additional strength, a standard approved PVC adhesive can be applied into channel of edge cap. **NOTE:** On slatwall panel, place staple between slots.


EXTRA STRENGTH: Especially for slatwall panel. Use #4925 aluminum edge cap. This reinforced channel is pre-drilled on center. To fasten use screws.

METAL GRIDWALL & SLAT GRID: Use grid adapter #2687. **Foam or paper honeycomb panels** use a construction grade two sided tape or an approved adhesive. **NOTE:** Some adhesive are not compatible with "foam". Consult manufacturer or supplier.

PVC SLATWALL PANELS: For lightweight applications use #3609 plastic edge

STEP 2

Apply Walls+Forms™ CornerForms™ to panel A.



Stand panel up.

Open the CornerForms™ "mouth", place over edge of panel (we recommend to start at the bottom of the panel).

Strike the CornerForms™ with the palm of hand at the bottom portion and continue by working upwards.

STEP 3

To join "free panel" B to "stationary panel" A. (This procedure will require assistance)

Maintain the "stationary panel" A in a secure position. Tilt B on one edge so the opposite or joining edge is approximately 6" off the floor. Insert joining edge into CornerForms™ "mouth". Push downward into "mouth" while your assistant simultaneously strikes the back of the CornerForms™ at the point of the panel B contact. Continue upward as the form snaps over the panel.


NOTE: This procedure is to be used with radius CornerForms™ angles, such as 30, 45, 60, 90, 120, and 135 degrees.



STEP 4

To join "non-radius angels"

- 180 degrees
- "T" connector
- 4-way,
- "y" connector,
- y/90 connector

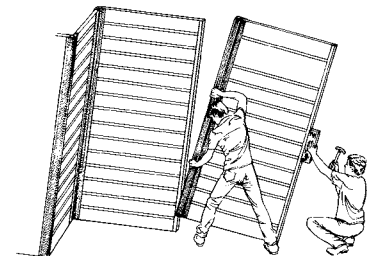




Place the form on the free panel B first.

Once the form is attached, tilt the panel back so the bottom edge is 6" off the floor. The assistant should guide CornerForms™ "mouth" over stationary panel's "A" edge cap. Firmly push or strike the opposite side (at point which form engages with panel) and continue upwards as panels fasten's together.

DISASSEMBLY INSTRUCTIONS

- Firmly grip "free panel" #B
- Lift upward and walk panel in the direction to increase (open) the angle of the "free panel". The panel will disengage from the "mouth" of the form.



NOTE: As panel rotates, edgcap may catch main form's interior ridge. If this situation occurs **DO NOT** continue because staples may be pulled from panel. To rectify, insert a standard screwdriver at problem point and run the length of the form.

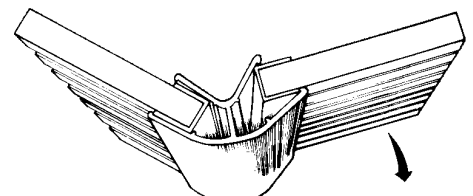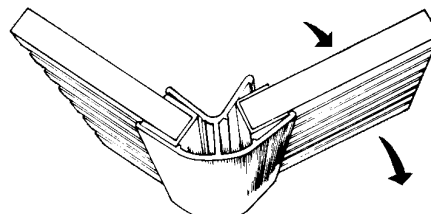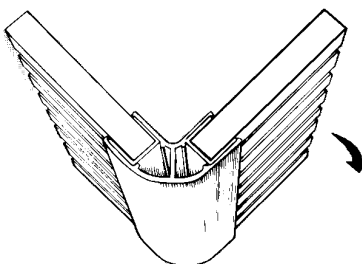


+ PANEL PROFILES

The following are several ideas that may be used to add stability to your design:

Note: We recommend the use of 'standard construction' methods whenever there is a question of safety.

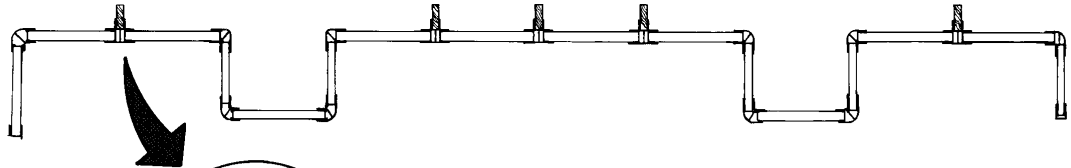


Perpendicular support panels should be a minimum of 18" wide.
NOTE: The actual width i.e. 24" to 48" will depend on the application.

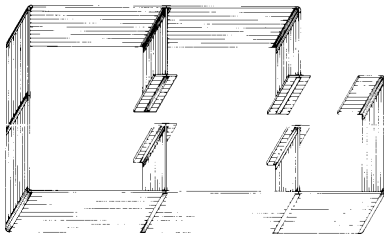



Walls + Forms™ fastening forms and panels are display components. Each installation is different and the methods of securing may vary. There is NO one standard technique or method to achieve stability.

Walls + Forms™ components can be easily assembled to construct a number of diversified displays. Create stability by arranging the panels in a configuration that establishes a "structural base". In addition, perpendicular panels can be inserted into Walls + Forms™ "T" Connectors to create support.




PARALLEL APPLICATION


In an application which "pop-outs" or perpendicular support panels can not be used, we suggest furring the existing wall with 1" x 4" or 2" x 4" studs and insert "8 drywall screws through the slatwall grooves into the stud. Also, Walls + Forms™ wall connectors can be used at the top of the panel.

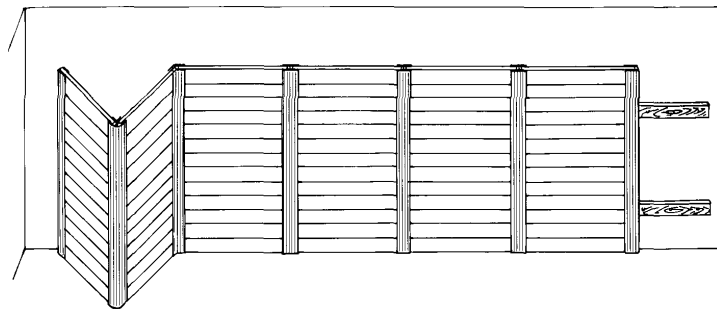

To secure parallel panels, a standard 2" x 4" board can be placed between the panels and #8 drywall screws inserted between the grooves.

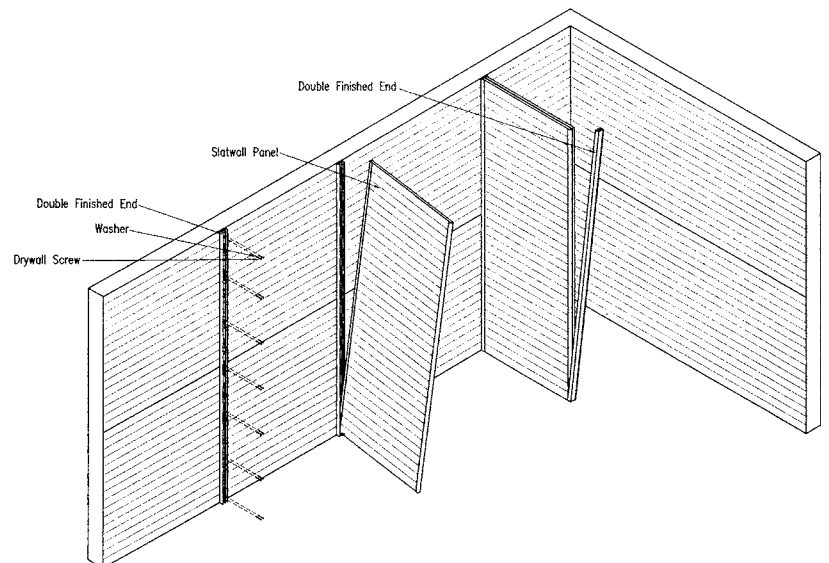


3/4" CubeConnects™



As the name implies the CubeConnects™ are used to assemble 3/4" panels into cubes of various shapes: squares rectangles, equal sided triangles, right angle triangles, octagons, and combinations of these. • The panel assembly is accomplished by running a 1/8" saw cut or kerf on the panel's vertical edge. This kerf is cut about 7/8" on center from the vertical edge and usually on the rear of the panel. IT IS STRONGLY RECOMMENDED THAT THE KERFING AND CUTTING PROCESSES ARE DONE ONLY AFTER THE CubeConnects™ for that project have been received and have been precisely measured to assure an accurate fit.

- Standard Lengths: 72" or 96"
Custom lengths are available, minimums apply and quantities may vary.
- Standard Colors: Matte Black, Designer White, Natural Almond, Dove Gray
- A 50% deposit is required for all customs orders.

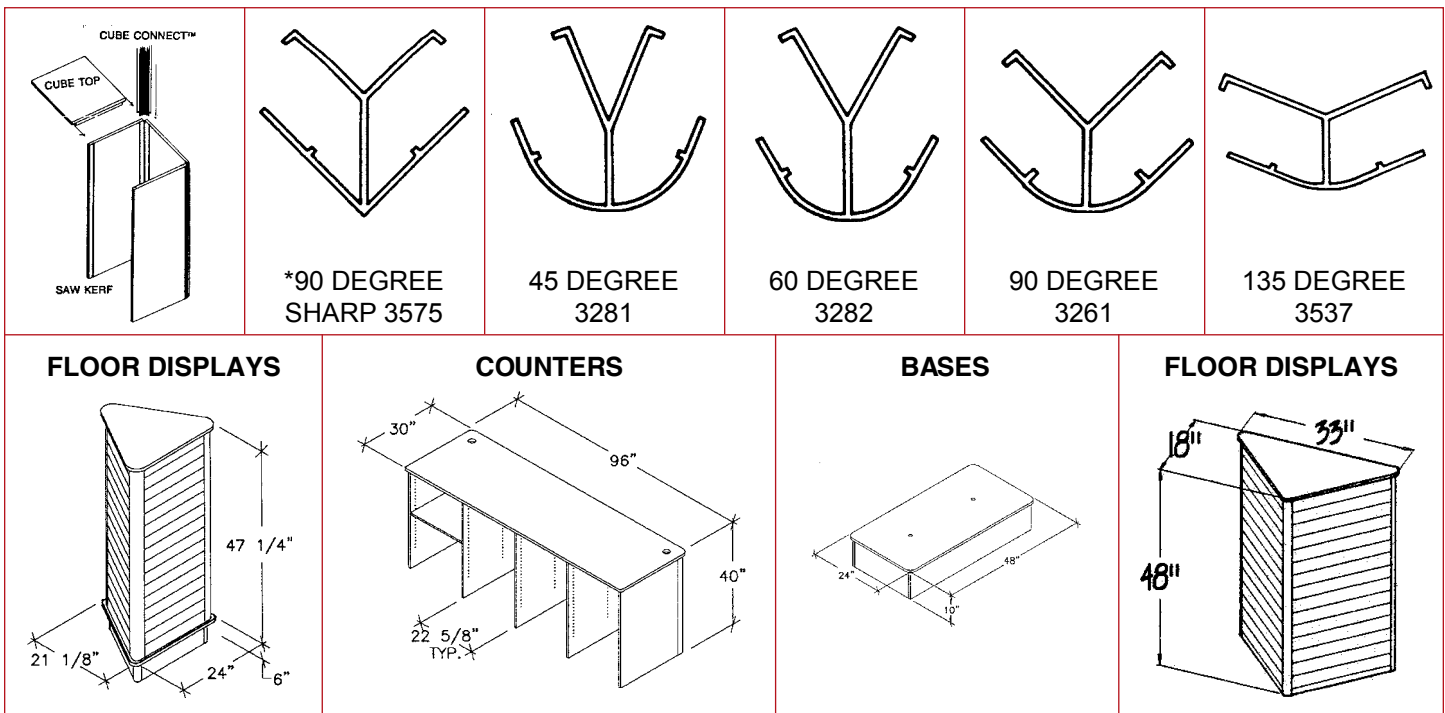


1/2" CornerFit™




A fastening co-extrusion, allows easy panel connection without any mechanical attachment. The "friction fit" design simply holds a nominal 1/2" to 5/8" thick panel. To apply, simply push panels edge into CornerFits opening until edge contacts back of panel. The Vinyl ribs will hold panel firmly "one directional".



Standard Colors: White, Gray, Black and Almond
Standard Lengths: 96"
Cap lamination surface with a smooth surface design



1/2" 90°
FT-936-6




1/2" 60°
FT-935-5

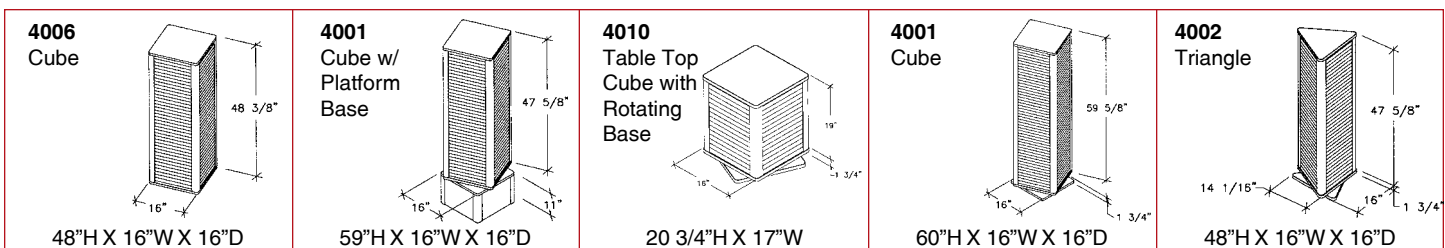


+ PANEL PROFILES

Edge Channels




P.V.C. EDGE CAP

Commercial grade P.V.C. channel achieves a positive connection with main form profile. P.V.C. edge caps are best used with stable, structurally sound panels. All retail perimeter wall applications should be secured to structural wall




EDGE CAP-PVC 2525




Designed to be stapled/glued to 3/4" panels

OVERSIZE EDGE CAP-PVC 3858




Designed to be stapled/glued to 3/4" panels with additional surface cladding

*INDENTED EDGE CAP-PVC 3567




*This PVC part is the same as #2525 except the legs are indented to provide a friction fit on foam and similar lightweight panels


1/2" EDGE CHANNEL 3716



1/4" EDGE CHANNEL 2193



Aluminum Edge Cap 4925




**ALUMINUM
EDGE CAP
4925**


ALUMINUM EDGE CAP

Extruded aluminum profile eliminates the possibility of panel bowing and warping. We recommend that aluminum edge caps be used on all freestanding applications in which the panels (especially slatwall) cannot be secured to a structural wall. When purchasing CornerForms™ fastening profile specify aluminum edge cap #4925, in place of P.V.C. Attaches to 3/4"+ wood/composite panels by inserting screws into pre-drilled/countersunk holes. This extrusion provide extreme rigidity to slatwall panels.

25/32 inside dimension will accept a 3/4 panel with or without an HPL finish. Radius corners allow easy assembly and disassembly. Greater wall thickness for increased panel strength.

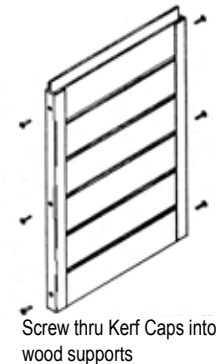

The pre-drilled and countersunk holes allow easy installation. They are located so that they align between slatwall slots on 3" o.c.




FEATURES


- **Tapered "legs"** - allows for a professional appearance and fit.
- **Thick "back"** - greatly increases the strength of the profile without adding weight.
- **Pre-drilled and countersunk holes** - make installation quick and secure. Holes are placed between slatwall slots 3" on center.

Kerf Cap


Attaches to 3/4" wood and plastic panels using 1/8" saw kerf cut on front and back of the edge of panels. This profile provides rigidity and maintains ease of CornerForms application




ALUMINUM KERF CAP
5526




PVC KERF CAP
3609



"Fin" Kerf Cap 7303 Aluminum

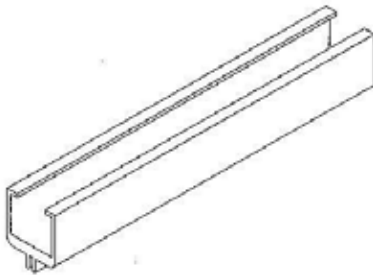

Designed with an extended double edge or "fin" running the length of profile. The profile is made to insert plastic or wood panels into aluminum exhibit systems. Attaches to 3/4"+ panels in the same manner as Kerf Cap profile 5526.

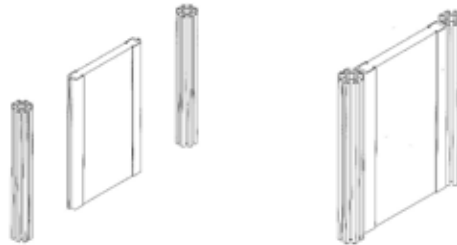





FEATURES

- Same as 5526; in addition to, a double "fin" that nest into aluminum "Hub" systems. Top horizontal brace can be securely fastened by inserting a screw into end of double fin.

Gridwall Adapter

Grid adapter channel is made of durable PVC. Made to snap over vertical double wire edge. Use on standard 1/4" wire diameter grid, allowing grid panel to be integrated in a CornerForms™ system

GRID ADAPTOR PVC
2687

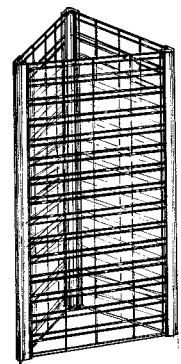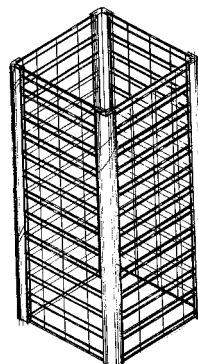

+ PROFILES: PLASTIC, METAL & WOOD


Aluminum Components Profiles

Aluminum Edge Cap 4925

Attaches to 3/4" + wood/composite panels by inserting screws into pre-drilled/countersunk holes. This extrusion provide extreme rigidity to slatwall panels.

Features

Tapered "legs" - allows for a professional appearance and fit.
Thick "back" - greatly increases the strength of the profile without adding weight.
Pre-drilled and countersunk holes - makes installation quick and secure holes are placed between slatwall slots 3" on center.

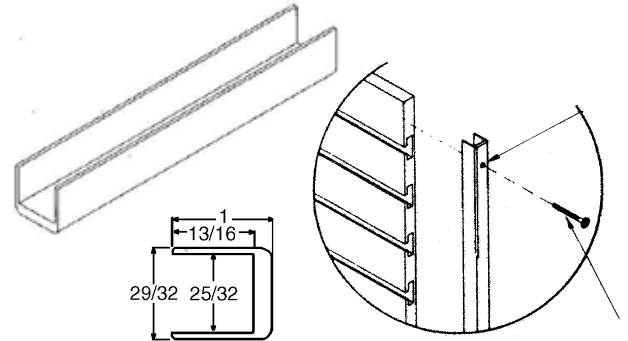


Aluminum Kerf Cap 5526

Attaches to 3/4" + wood and plastic panels in conjunction with applying an 1/8" saw cut or "kerf" on front and back of the edge of panels. This profile provide rigidity and maintains the ease of CornerForms™ assembly and disassembly

Features

Tapered "legs" - allows for a professional appearance and fit.
Thick "back" - greatly increases the strength of the profile without adding weight.
Pre-drilled and countersunk holes - makes installation quick and secure holes are placed between slatwall slots 3" on center.

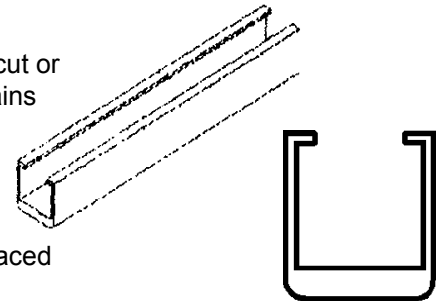


Aluminum "Fin" Kerf Cap 7303

Designed with an extended double ridge or "fin" running the length of profile. The profile is made to insert plastic or wood panels into aluminum exhibit systems. Attaches to 3/4" + panels in the same manner as Kerf Cap profile 5526


Features

Same features as 5526 along with a double "fin" that nest into aluminum "hub" systems. Top horizontal brace can be securely fastened by inserting a screw into end of double fin.

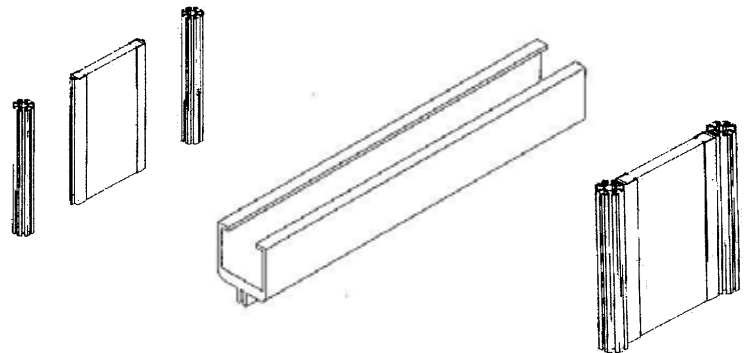

Bull Nose Profile 6003


Dramatically reduce wear and tear, while enhancing the appearance of any edge. This architectural profile create a durable edge on any machined 3/4" thick panel. Ideal for shelving, counter tops and vertical and fascias. Ask for machine specifications for proper "dovetail" measurements.

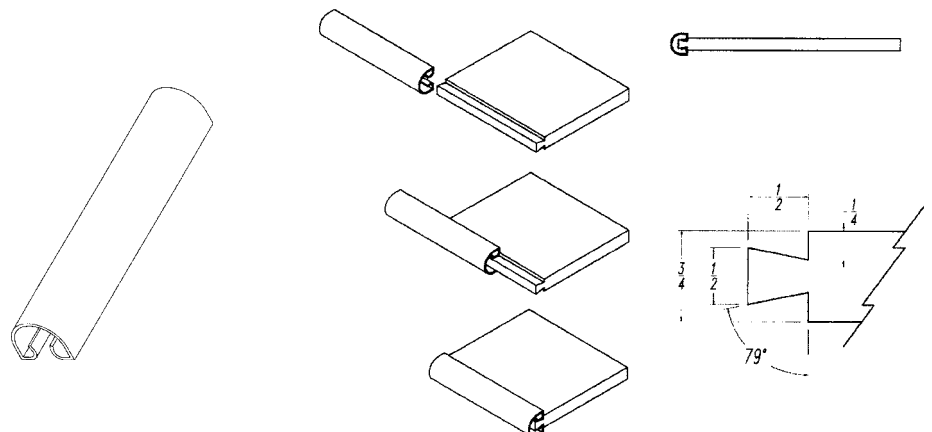

Corner Posts 3031/501


Three Way Posts 2933/502

Both profiles are excellent solutions to freestanding wall applications where metal wall standards are required for product display. These structural profiles feature "formed" channels that nests traditional metal steel standards. Corner Posts and Three Way posts are designed to accept 3/4" + pre-drilled countersunk holes. Available in 96" lengths. Applications can vary, from fitting rooms, office partitions, to merchandising dividing wall, trade show booths and more.

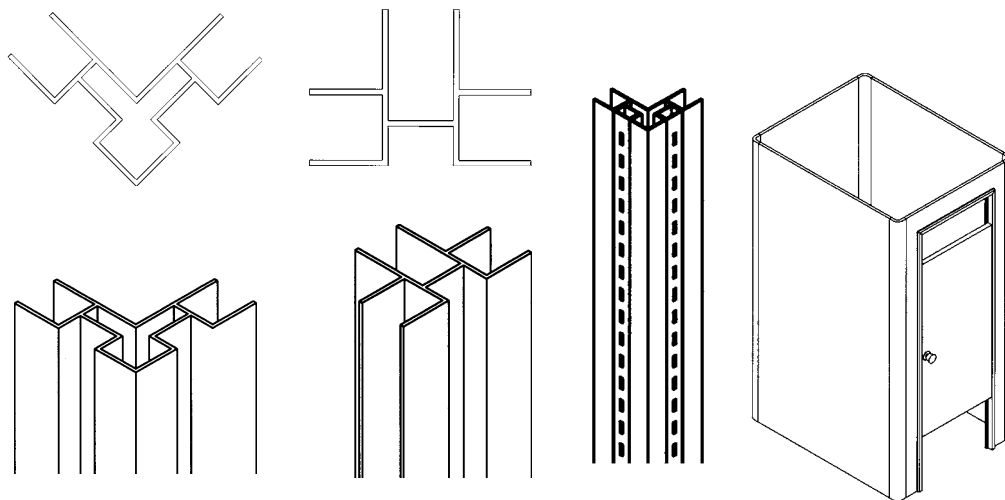


Tube 3369

All purpose commercial aluminum extrusion design for a variety of different display applications such as table legs, signage headers, and more. Available in 96" lengths in satin finish. 1 1/4" round can receive standard "star" inserts for levelers, bolts and caps. Walls+Forms™ slatwall metal "Z" clip can be attached to tube for even more uses.

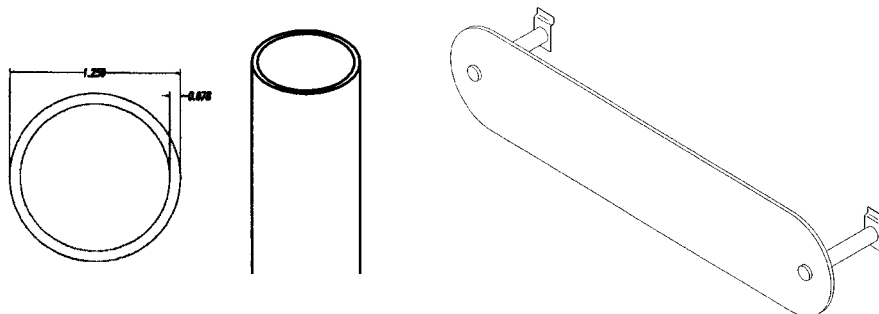


Rectangle Posts 1200

Made specifically for EuroSign™ "top hinge" and end caps components. This durable all purpose aluminum profile can be ordered in standard 96" lengths or cut to size lengths.

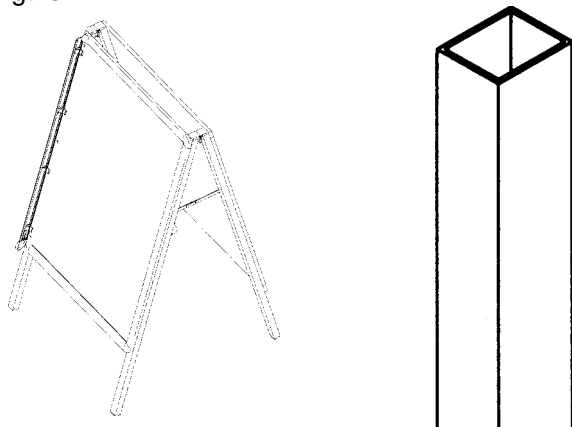

Shelf Profile

All aluminum shelf "mounting" profile is designed to receive standard tempered 3/8" thick glass, wood, or plastic. A nylon gasket can be specified to "hold" shelf. Standard length is 48". Custom lengths are available up to 96". Colors are white or "mill finish".

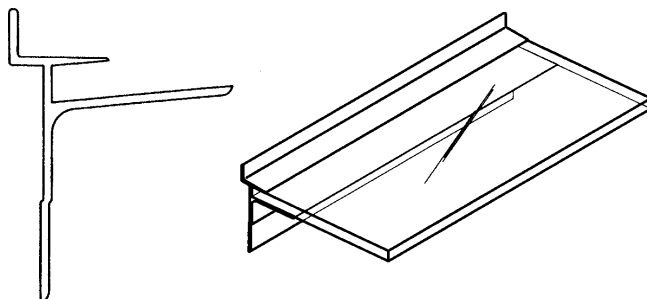

+ PROFILES: PLASTIC, METAL, WOOD



Profiles & Accessories

3652 Inside/Outside Corner Moulding

The inside/outside corner moulding is designed for a 90 degree inside or outside corner application


Benefits:

- Insures consistent appearance with built-in tolerances that allow for walls being out of plumb
- enables quick and easy installations
- unique dual purpose design lessens the number of components

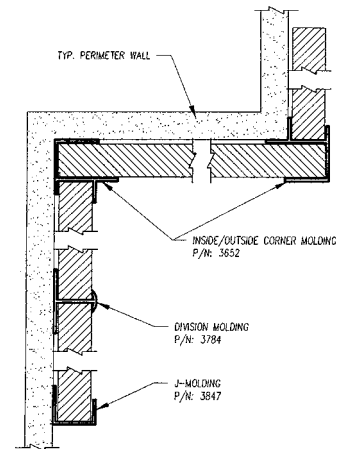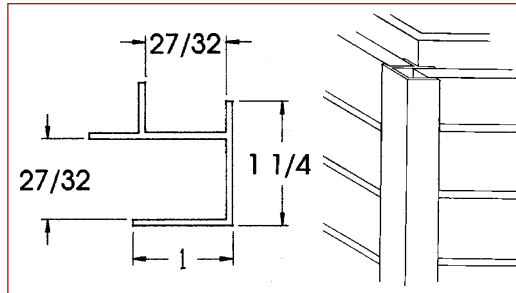

3784 Division Moulding


The division moulding is used in construction applications where the panels are joined "Side by Side", vertically or horizontally.

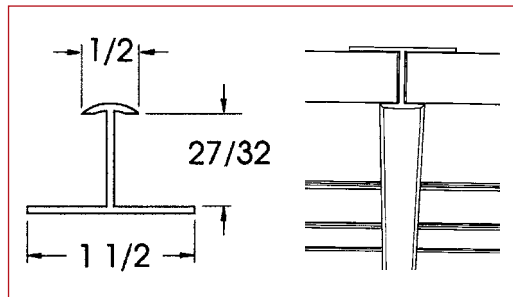

Benefits:


- eliminates unsightly gaps
- improves groove alignment

Metal Shelf Clip



1" wide, metal "Z" clip. All purpose design fits standard slatwall "T" groove. Chrome or Silver Finish.


PVC Clip



2" lengths, extruded of commercial grade plastic. Z Clip is designed to mechanically fasten to slatwall accessories. Easily drilled and stocked in "obscure clear". Other lengths are available upon request


Downslant Bracket

3" lengths, extruded of an extremely rigid PVC compound. This component is designed to be attached to the bottom of wood or particle board shelves, to provide about a 40 degree down-slant. Designed to direct weight loads on to the face of the slatwall panel, it minimizes stress on the "slat" itself where load failures most often occur. Easily cut on a mitre saw and easily drilled to fit any number of custom fabrications. Stocked in white.



3847 J Moulding


The J moulding is a versatile construction profile, used to "finish" or cover a vertical & horizontal edge of a panel.

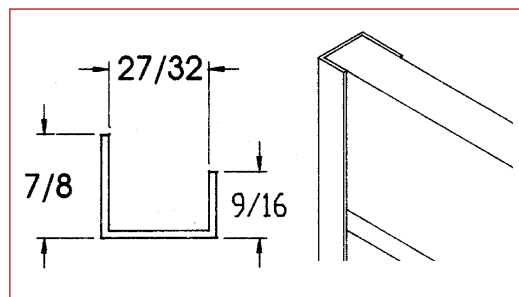

Benefits:

- provides a clean consistent finished edge to slatwall
- eliminates expensive edge banding or wood mouldings
- enables an easy and quick application


DuraShelf




3 1/4" d X 24" long, designed to merchandise product "face-out" such as Video cassettes, computer software, and books. This unit has about a 10 degree up-slant and a "ridged-no-slip" surface to keep the product leaning back against the slatwall. Stocked in "Obscure" Clear, Dove Gray, Designer White, Natural Almond, and Matte Black.

Slatwall Flat Bracket - Steel

Slatwall Bracket is a versatile accessory made to connect all standard slatwall. dimensions are 2" w X 2-3/4" (overall height is 3-3/8") hole with a 7/16" Zinc Finish.

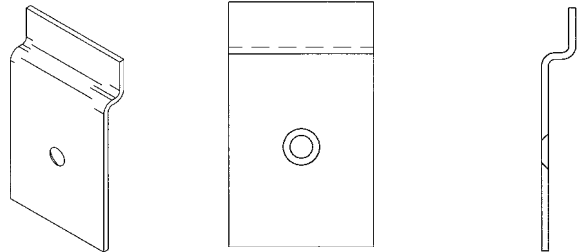


3957 "Z" Bracket



All purpose slatwall accessory; this durable profile is designed for slat-wall applications where products or displays are positioned vertically on panel. For example, picture frames, poster, signage, light boxes, etc.


Clear Slatwall "Z" Bracket
Available in 96" Lengths



4160 "J" Ear-ring Holder

Available in 96" Lengths "Obscure" clear


Designed for displaying package items such as ear-ring, necklaces, rings, stickers, etc.

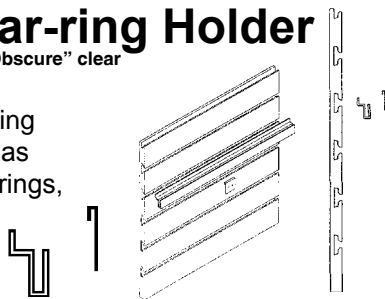

1188 Shelf Profile


Available in 96" Lengths

Colors are white, grey, black & almond



Made for hanging 1/2" (nominal) board for shelving. Shelf can be held in place by a small dado "saw cut" applied to bottom of board or by inserting a screw through back of profile.


100 pc. minimum




"L" Shape Profile

*1-1/2" X 1-1/2" - 5/8" X 5/8"
3/4" X 3/4" - 1" X 1"


"L" Channel




1 1/4"
L Channel




7/8"
L Channel




Hinge Profile



1/2"
Panel Hinges



1/8" - 1/4" - 3/8"
Panel Hinge



3/16"
Panel Hinge

+ PROFILES: PLASTIC, METAL, WOOD



Wood Moldings

Cornice Wood Moulding 8010-00

Made of selected poplar, this precision "shaped" moulding is designed for multiple cabinet and fixture applications. It features a decorative architectural 45 degree crown with 5/8" dado groove that accepts a 5/9" panel. Molding cut is easily mitered cut, painted or stained.

Standard lengths are 96" no minimum required

Ships via UPS, FedEx and Airborne

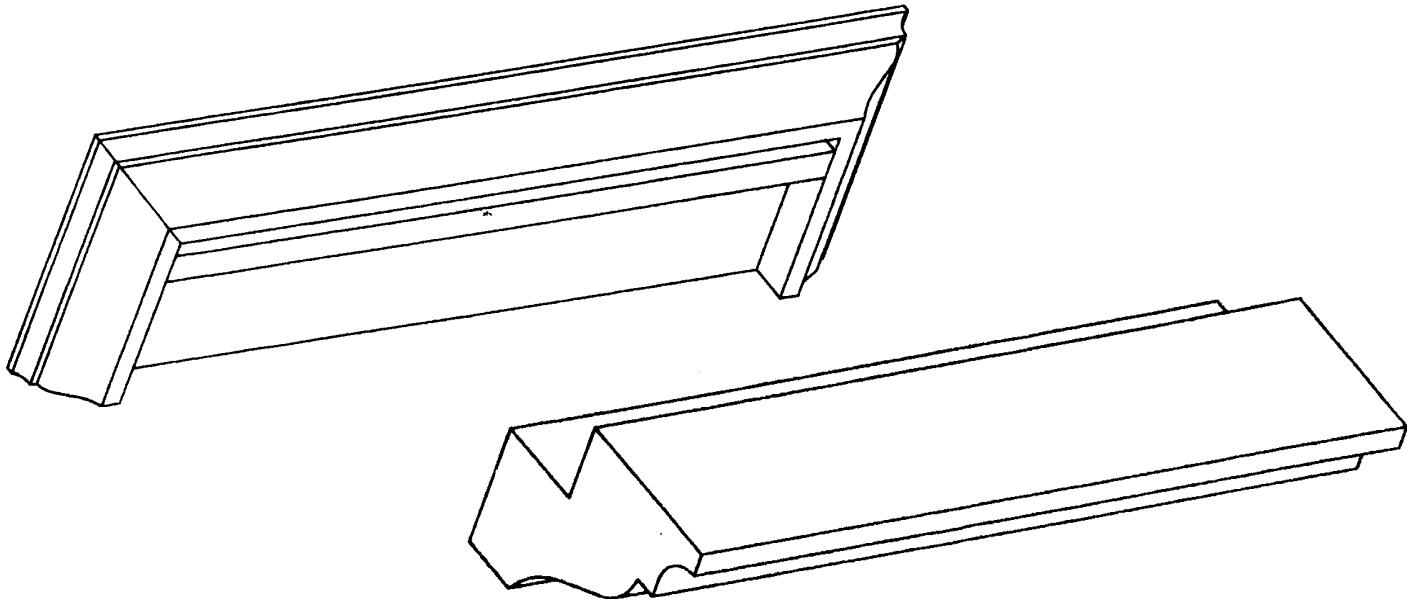


Wood Door Moulding WDM-00

This commercial grade popular moulding is designed to be attached to 3/4" thick edge of "cutout door opening". Once opening has been "framed" a variety of 1 1/8" thick hollow core or louver doors can be mounted utilizing "standard surface mounted" type of hinge.

Standard lengths are 96" no minimum required



Ships via UPS, FedEx and Airborne

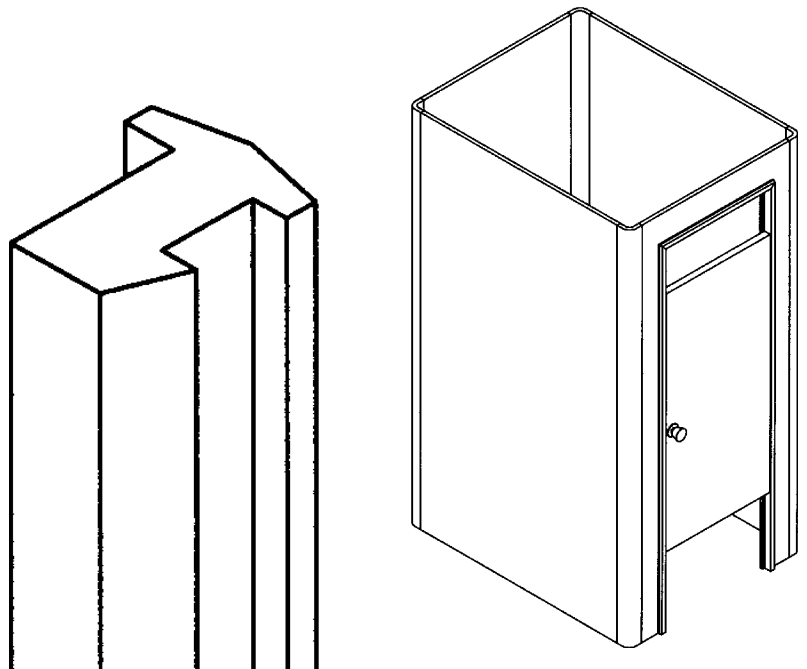

Wood Moldings 6700-00

1 1/2" radius molding profile made where a radius edge is required and post laminate. Crafted from selected commercial grade popular.


Standard lengths are 96" no minimum required
Ships via UPS, FedEx and Airborne

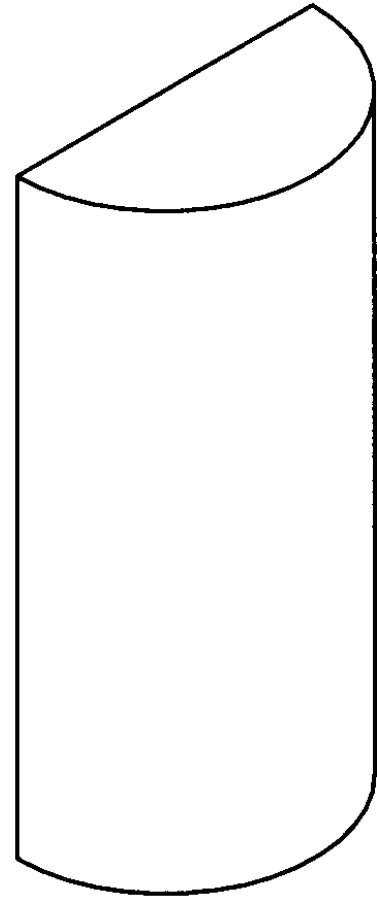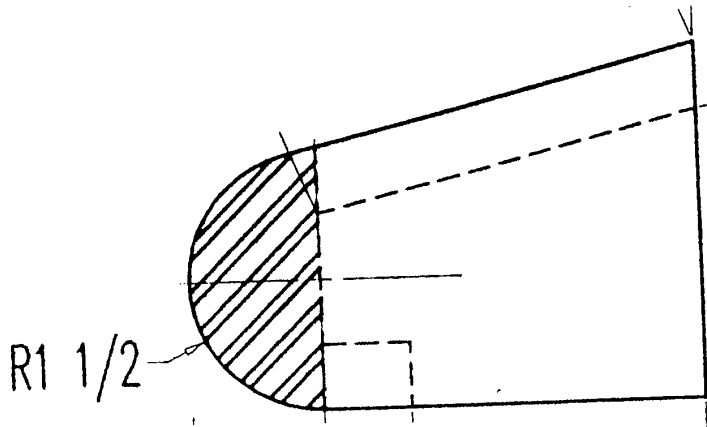



Wood Moldings 6701-00

Same as 6700-00 above, a 1 1/2" radius molding profile made where a radius edge is required and post laminate. Crafted from selected commercial grade popular.

Standard lengths are 96" no minimum required
Ships via UPS, FedEx and Airborne

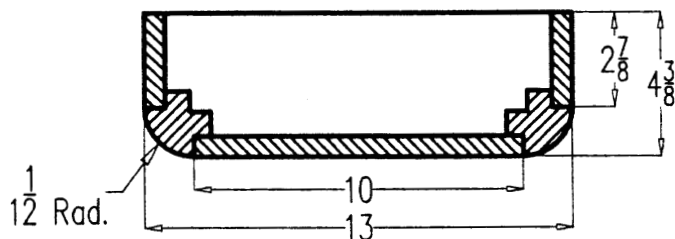


TOP VIEW

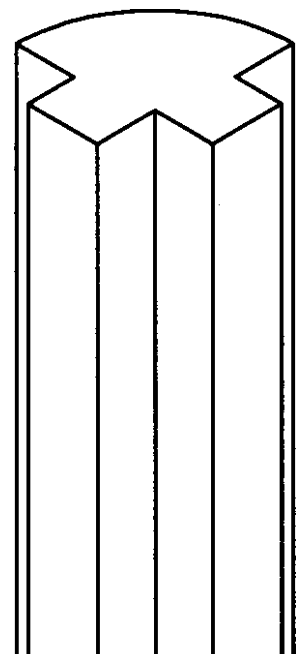


+ DISPLATRIX

Displatix™

Post + Frame Display System

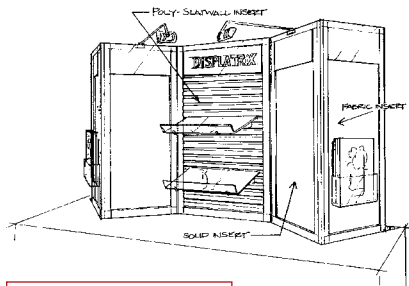


Displatix™ is designed for quick and easy assembly & disassembly. The individual component system allows expansion, re-configuration and down sizing by simply adding or subtracting parts. Frames and posts connect with a simple sliding motion. No tools or hardware are required. Display panels can be easily repositioned, allowing for numerous setup designs using the same parts & components. Displatix™ is an excellent system to construct exhibit backwalls, point of purchase displays, graphic displays, table top merchandisers, lightboxes, and many more.



Displatix™ **Frame** profile is designed to receive a nominal 1/2" to 5/8"(t) thick panel; specifically Walls+Forms™ plastic slatwall profiles #4000 and 3800 series (see polymer slatwall section). These profiles are connected to create a frame by special made corners. Frames can be fasten together by connecting posts.


Standard lengths - 96"

Colors - Grey, white, black, almond, grey granite and sand granite




Corners

Friction-fit corners are made of rigid plastic; to join frame profile together, simply drill a 1/8" diameter hole 1/2" from edge and insert corner. (See Panel Assembly Step 1)




S Profile

Profile used in creating pinwheel panel configuration



Panels

5/8" maximum thickness
3800 Plastic Slatwall - 3" o.c. grooves
4000 - Plastic "Economy" Slatwall - 1 1/2" o.c. grooves
Velcro Receptive Fabric Cover Panel
Solid Panel, or dry erase panel.




Button and Pins

All purpose construction accessories. Button can be use in panel size exceeding 17 1/2 wide X 48". Buttons are place at mid-distance between corners. Pins can be use to secure floor display to base.



Metal Clip

Secure panel material into Displatix™ frame that is less than 5/8" thick.

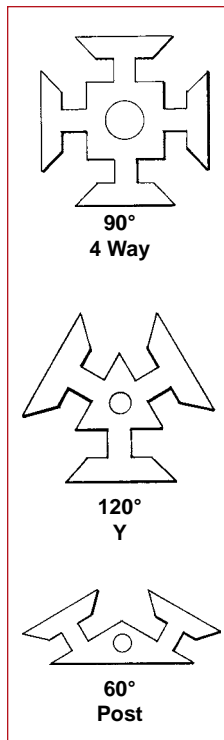

Posts

All plastic construction, easy to assemble and versatile in design

Panel Assembly

	<p>Step 1</p> <p>Top & Bottom</p>	<p>Step 2</p>	<p>Step 4</p> <p>Insert PVC slatwall planks "lip" side down, see slatwall diagram</p>	<p>Step 5</p> <p>Apply button once panel is assembled, drill 1/4" hole through back of frame into plank & insert button into hole.</p>
	<p>Step 3</p> <p>Secure corner area make sure connection is complete.</p>			

Floor Displays

Stock "Pre Construction" displays; durable plastic slatwall merchandiser

Colors - White, Grey, Black, Almond, Grey Granite, and Sand Granite.

Plastic Slatwall - 1 1/4" or 3" o.c. grooves

--	--	--

Floor Display Assembly

<p>STEP ONE Lay swivel base on level floor; place 2 slatwall panels side by side to create a 90 degree angle onto swivel base</p>	<p>STEP TWO Slide one connector into edges of both slatwall panels and then slide another connector.</p>	<p>STEP THREE Place remaining slatwall panels onto base and slide connectors into edges of slatwall panels</p>	<p>STEP FOUR Place plastic lid onto top of displays, push in plastic pins through holes in bottom of slatwall panels to complete the assembly</p>
--	---	---	--

+ PANEL PRODUCTS

Walls+Forms™ Polymer Slatwall

Incredibly Lightweight and Virtually Indestructible!


Walls + Forms™ Plastic Slatwall is virtually indestructible and incredibly lightweight. There are six styles to choose from including 3/4" thick-heavy duty 1 1/4" on center grooves. Standard 3700 / 3800 series 3/4" / 5/8" thick panels with 3" on center grooves. Economy slatwall 5/8" thick available in white, grey granite, black, almond, sand granite, medium grey, and designer white. Each plank is 6" high by 96" length and has an interlocking feature which allows planks to be stacked for easy installation on a wall, display frame or you can construct a panel using Walls + Forms™ system. Our plastic slatwall products accepts all standard slatwall hardware and can be safely shipped by UPS, Federal Express or Airborne.

Feature Benefits:

- Lightweight, Ships U.P.S.
- "High" impact resistance & load carrying capacity
- Ease of installation; panels can be stacked to any height.
- Each plank has an interlocking feature.
- Requires less cutting; permits higher yields.
- 100% color; scratch resistant
- Accepts all standard "slatwall" hardware
- Colors: Black, White, Gray, Almond, Gray Granite and Sand Granite



Heavy Duty 4100 Series

Application High Load
Groove 1 1/4" On Center
Plank Size 6"H X 96"W X 3/4"T
Shape "L" Design
Shipping Method UPS
Receives all standard Hardware Yes





Economy 4000 Series

Application Lightweight
Groove 1 1/4" On Center
Plank Size 6"H X 96"W X 5/8"T
Shape "L" Design
Shipping Method UPS
Receives all standard Hardware Yes





3900 Series

Application Double Sided
Groove 2" On Center
Plank Size 6"H X 96"W X 5/8"T
Shape "T" Design
Shipping Method UPS
Receives all standard Hardware Yes





3800 Series

Application Standard
Groove 3" On Center
Plank Size 6"H X 96"W X 5/8"T
Shape "T" Design
Shipping Method UPS
Receives all standard Hardware Yes




3700 Series

Application Standard
Groove 3" On Center
Plank Size 6"H X 96"W X 3/4"T
Shape "T" Design
Shipping Method UPS
Receives all standard Hardware Yes




Select from "Ready to use Panels" or "do it yourself" and Create Panels with Walls+Forms™ Polymer Planks and Kerf Caps

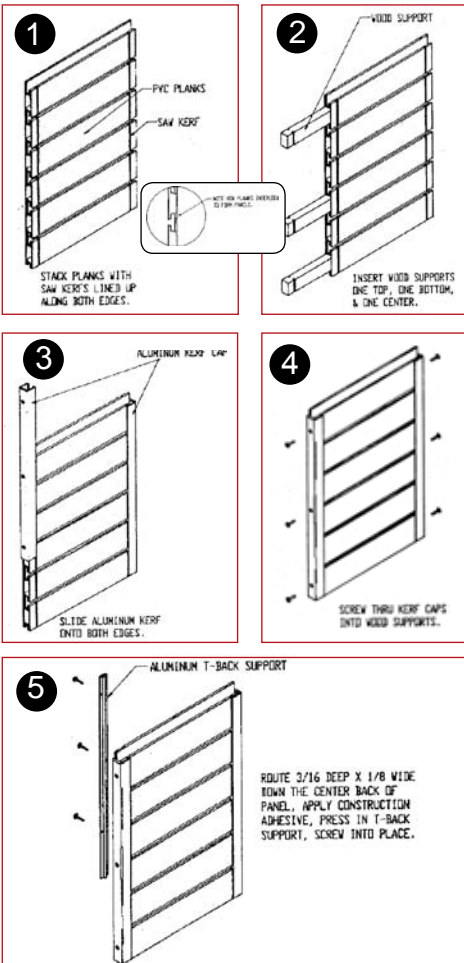

Assembly Notes:


Kerfcap enables the PVC planks to be assembled into panels that "snap" into CornerForms™. It requires a saw cut approximately .875" on center from the vertical edge of the planks. It is STRONGLY suggested that a trial cut be performed in order to verify the saw settings are correct. Wood supports are inserted in top, middle and bottom planks.

T-Back Support is inserted in a 3/16" deep saw kerf cut vertically on the back of the assembled planks to give additional rigidity to the panel. One T-Back Support is recommended for every foot of width over 2 feet.

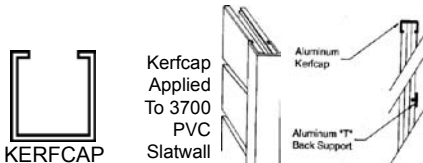


Plastic Wood Slatwall

New PlasticWood Slatwall is made from a new revolutionary "Poly-foam" plastic that has the appearance and feel of wood. PlasticWood Slatwall was engineered for strength and durability with the aesthetics of traditional laminated and veneered slatwall. Similar to wood, it can be machined, drilled and even sanded, but without the negative characteristics, such as warping, cracking, splitting, or bowing. The planks are made of 100% solid color, so wear marks, blemishes and scratches can be easily sanded or polished away. PlasticWood Slatwall is designed to receive standard slatwall hardware. Grooves are 3" on center and are the same as the face color, thus eliminates the need & expense of color groove strips. PlasticWood Slatwall load carrying capacity is similar to MDF slatwall with reinforced aluminum groove inserts. The high strength, low weight commercial grade plastic is far superior to the traditional plywood or MDF slatwall substrate.

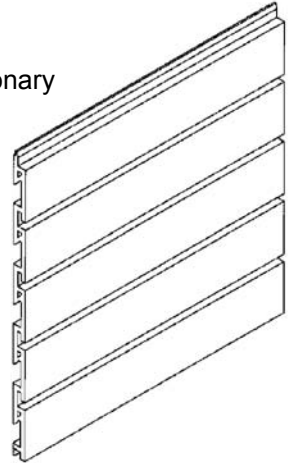

Color Wood Pine and Wood Cedar
 Groove 1 1/4" On Center
 Plank Size 15 1/3"H X 96"W X 3/4" T or 15 1/3"H X 48"W X 3/4" T
 Shape "L" Design
 Shipping Method UPS
 Receives all standard Hardware Yes

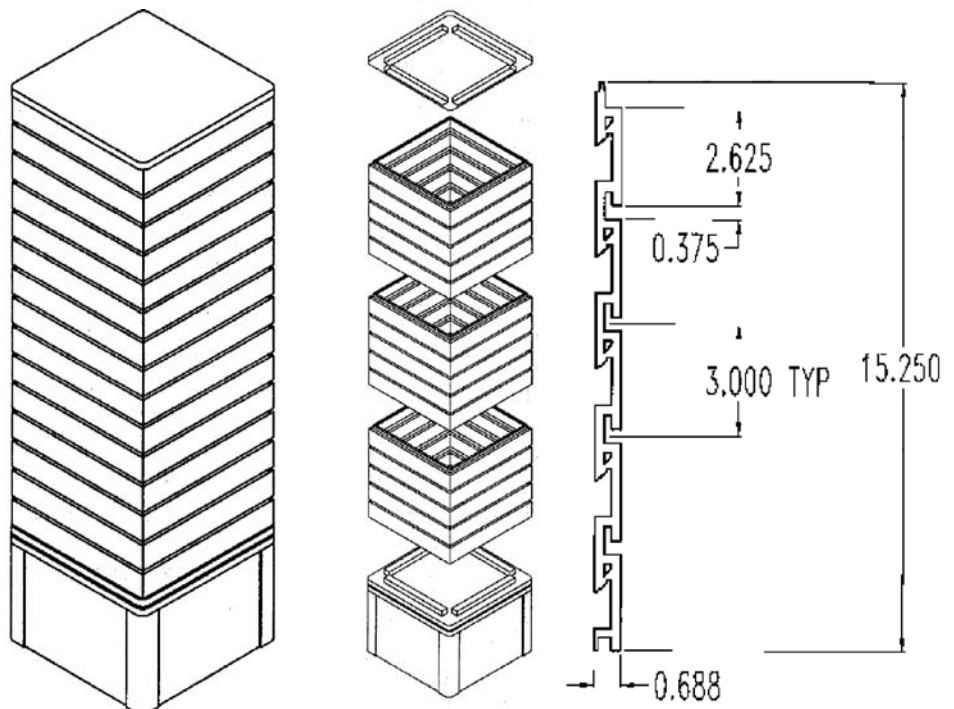

+ PANEL PRODUCTS

MDF (Wood) Slatwall Panels

3" on center grooves, beveled "T" Groove.
Medium density fiberboard substrate.

Slotting Formats

Horizontal - 48" high X 96" wide X 3/4" thick


Vertical - 96" high X 48" wide X 3/4" thick

Surfaces


Paint Grade - Raw board, make to paint

LPL - low pressure plastic laminate; pre-laminate face

other surface laminates are available

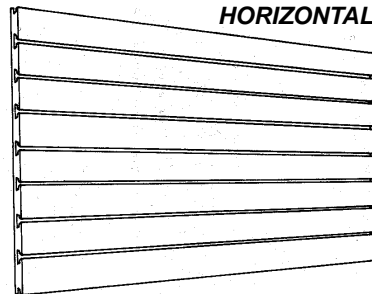



HORIZONTAL

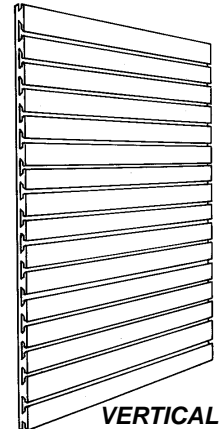

VERTICAL

Ply-Foam Panels



Lightweight, durable
multi purpose panel,
miranti plywood face
(solid face will accept
screws), expanded
foam core.

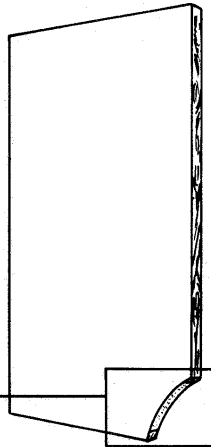

Application	Multi purpose
Panel Size	96"H X 48"W X 3/4"T
	48"H X 48"W X 3/4"T
	96"H X 33"W X 3/4"T
	96"H X 24"W X 3/4"T
Weight	Base 32 lbs

Custom Adders include

1. HPL laminate
2. Custom cut sized
3. Velcro receptive fabric

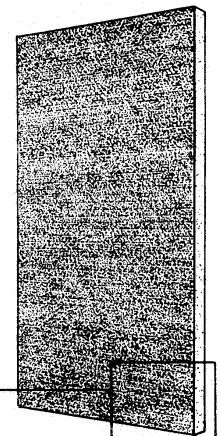

Dry-Erasable Surfaced Panels


White surfaced 1/4" thick MDF panels are laminated with a "special" lacquer that permits the use of the appropriate marker pens and then wipe clean with a cloth or sponge. Special surface has "wipe ability" even after a period of 1 to 4 weeks, longer periods depending on marker pen used, ink residue can be removed using a household cleaning liquid.


Solid Panel - Surfaced One Side - 48" x 96" x 1/4" thick
Other sizes are available, see customer service.

Poly-Styrene Panels


All purpose extruded panel was developed for moisture applications. Made of 100% white resin color. Panel is featured as a backer board in DisplayFrames.

Solid Panel - Surfaced One Side - 48" x 96" x 1/4" thick

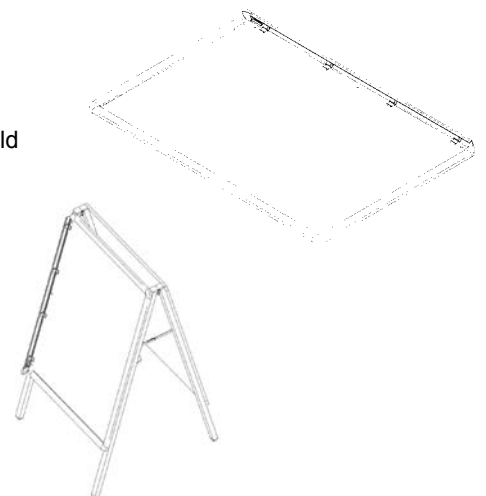

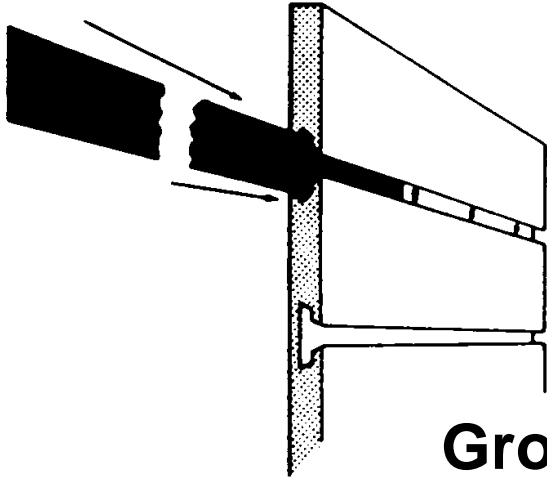


Groove Treatments

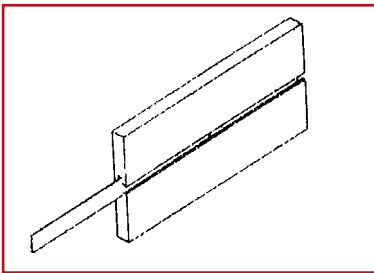

ColorAccent - 3266

This color accent groove strip fits into all standard slatwall grooves. The strip is applied from the side at time of panel installation. A variety of designer colors are available to compliment or contrast to the slatwall surface.


Colors: aqua, Nile green, burgundy, blue, red, black, grey, almond and white
Length 96"

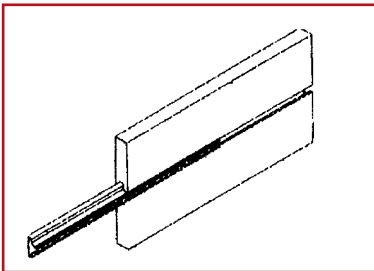

"T" Groove Strip - 3951

"T" profile is a rigid plastic extrusion that enhances the slatwall appearance as well as lessen the chance for surface chipping. The profile is designed to be inserted from the side and fits standard "beveled" "T" grooves. It is recommend to insert before installing slatwall.

Colors: grey, almond, red, black and white (designer color may require minimum qty)
Length 96" - 16 Piece set

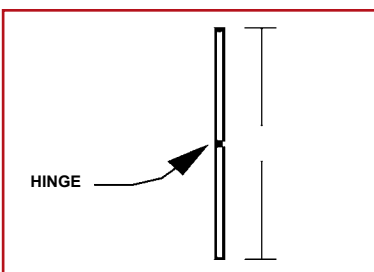

Flexible "RetroFit" Strip - 3607

The flexible "RetroFit" groove strip is designed to be inserted in slatwall that is either installed or will not accept standard groove strips. In addition to the flexible plastic construction, the retrofit strip has been "scored" to allow ease of installation from the front of the panel.

Colors: red, black, grey, almond and white (designer color may require minimum qty)
Length - 400' rolls

+ PANEL PRODUCTS

Peg Panel™





Walls+Forms™ is a new twist on a proven merchandising system pegboard. Our new PegPanels™ are made of 100% commercial grade plastic. The durable lightweight and moisture resistant plastic makes PegPanel™ an excellent display to meet today's harsh point of purchase promotions, trade show exhibitions, retail fixtures and food preparation applications. Designed to be practically maintenance free, PegPanels' FDA approved plastic construction can be easily cleaned and is machine washable. Unlike traditional wood and metal pegboard or slatwall products, PegPanel™ will not chip, warp, break, rust or absorb dirt and grease.

Description

100% FDA approved plastic pegboard molded panels. Accepts all standard pegboard hardware. Holes are 1/4" diameter, 1" on center. Peg-panels can be mounted vertically or horizontally. High strength, light weight commercial plastic panel has an 1/8" wall thickness and includes openings for screw placement and integral moulded ribs creates structural support

Dimensions

3/4"t X 32" h X 24" w
 3/4"t X 24" h X 24" w
 3/4"t X 24" h/w X 8" w/h
 3/4"t X 24" h/w X 4" w/h

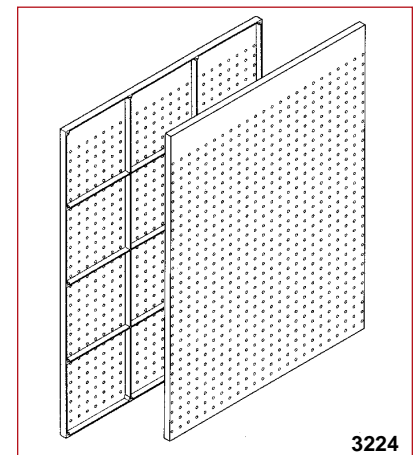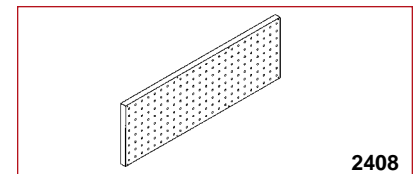

Color:

Stocked in White or Black. A variety of custom colors are available. Price and delivery time will depend on quantity and colors specified.

Weight:

32" X 24" 3.25 lbs each
 24" X 24" 2.75 lbs each
 24" X 8" 1.00 lbs each
 24" X 4" 0.50 lbs each

THE
***"Plastic
 Pegboard"***
SYSTEM

PEG PANEL INSTALLATION INSTRUCTIONS

Tool & Hardware Required

Phillips screwdriver


#8 1 1/2" screws (14 screws)

Bubble level

Peg-Panel Installation Instructions

Step1 Verify the desired location, and locate the studs in the wall where panel will be positioned. We suggest that you do not mount Peg-Panel on wall where electrical wires, plumbing or telephone cabling may be located.

Step 2 Align panel over studs (where possible), at the desired height. First insert screws at each corner and proceed with the other screw openings. Note: make sure Peg-Panel is lying flat against the wall. **Note:** If it is not possible to anchor Peg-Panel to a wall stud, use plastic "hollow" wall anchors to fasten panel securely to the wall.

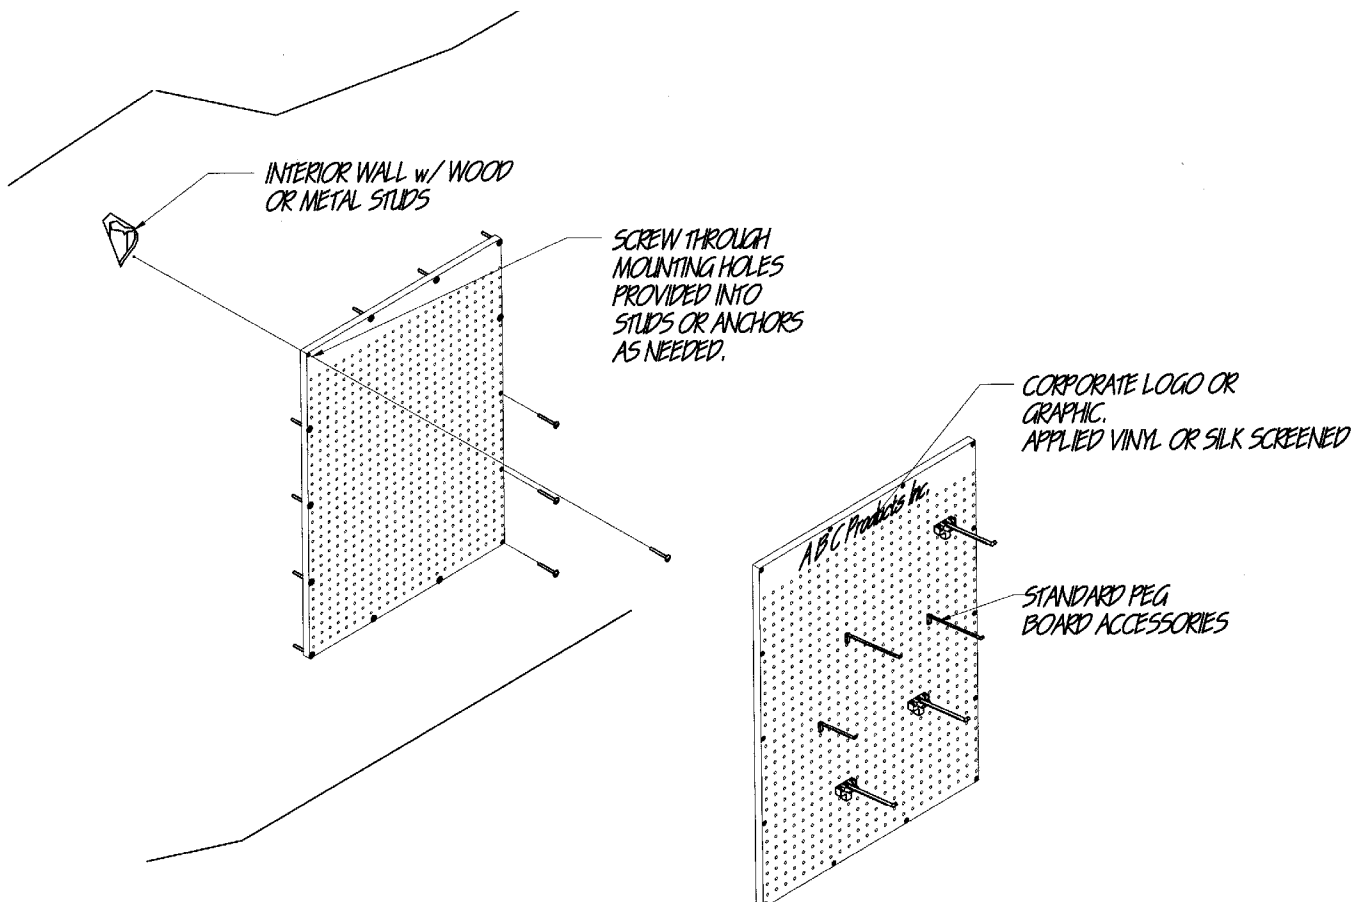

+ SIGNAGE

EuroSign™ Display Frames

DisplayFrame - 1400

An effective sign system that is designed to be attach to a wall or structure. DisplayFrames feature a unique “flexhinge” system that allows the frame & corners to swing out for easy “Front loading” of sign material.

Standard DisplayFrames consist of durable frame profiles with integrated radius corners. The contoured frames are factory applied onto the “patented Flex Hinge” and are factory mounted to a tempered hardboard or polystyrene backer panel. Each DisplayFrame includes “ready for use” mounting holes, double-sided tape and screws.

Dimensions

ID	Poster Size	ID	Poster Size
B0-1400.....	36" x 48"	C3-1407.....	20" x 20"
B1-1401.....	30" x 40"	B3-1403.....	18" x 24"
B2-1402.....	24" x 36"	C4-1408.....	23" x 09"
C1-1405.....	22" x 28"	B4-1404.....	11" x 14"
C2-1406.....	21" x 24"	B5-1409.....	8.5" x 11"

Colors

Standard frame colors are -UV plastic white, black, Satin finish aluminum, red, grey, & blue.


Back panel color is white face/unfinished hardboard.

Polystyrene panel is surfaced white two sides.

Special Surface

The commercial grade backer has a special “Dry Erase” surface and is manufactured for “long term interior commercial use. When ordering please describe your application to determine type of back panel needed such as hardboard or polystyrene.

- Patented “flex-hinge”
- Durable
- Secure Graphics Safely

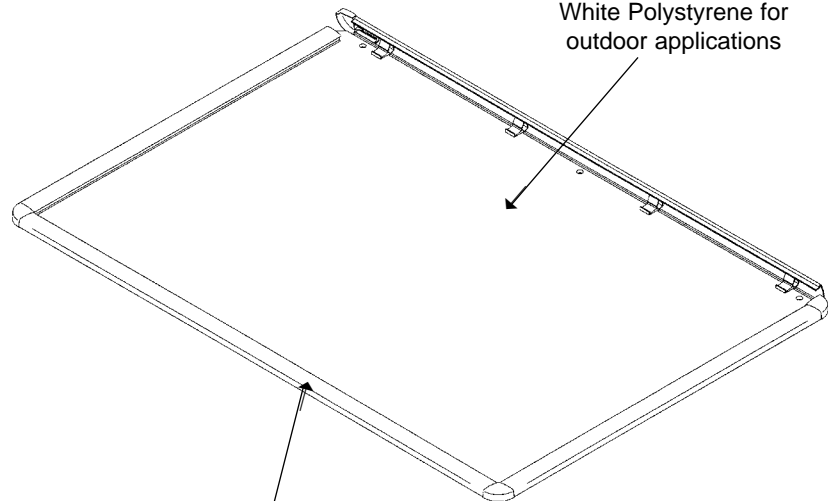


Backboard
Dry Erase Gloss White for
Indoor applications
or
White Polystyrene for
outdoor applications

Frame Profile

35mm or 28mm

Colors - White, Grey, Black,
Red and Blue - (plastic)
Satin Aluminum (aluminum)
Aztec Gold (aluminum)

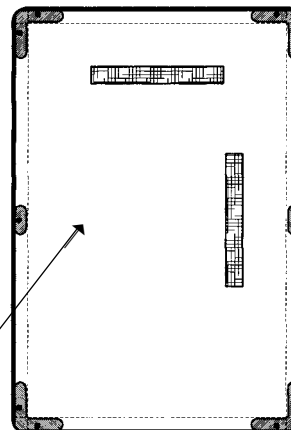

**Double Sided
“Die-cut Tape”**

Durable
1/4" MDF
Smooth Backboard

Each DisplayFrame features our patented “flexhinge”, this unique hinge allows the entire frame and corner to open easily for quick sign installation. Available in aluminum “satin” finish, black & white plastic. Designer colors are available in blue, red, black, white, and grey plastic.

To meet the demands of commercial use. DisplayFrames are constructed with durable back panels; choose tempered hardboard or polystyrene. To protect your signage materials from moisture and dirt, anti-reflection covers are available.

EuroSign™ Graphic “A” Stand

is a new look to a proven advertising method. The contemporary “European appearance” and durable construction allows you to place your message where your customer can see it. Designed for a variety of commercial uses, such as, retail stores, restaurants, lobbies, hospitals, trade show exhibits and more; GraphicStands can attract customers as they pass by or inform them as they enter.

Now you can select the optimum location to promote your company, your products and your exclusive offers.

GraphicStands are available in custom sizes and a variety of DisplayFrame colors.

Dimensions

Standard Stock Size

In Use 46 1/2”h x 25 1/2”w X 27” Depth
Folded..... 48”h x 25 1/2”w X 4” Depth
Poster 24”w X36”h

Colors

Standard frame colors are -white, black UV plastic or satin finish aluminum.

Other frame colors are available in red, grey, and gold. “A” Frame posts are anodized aluminum finish. Back boards are tempered MDF hardboard gloss one side for interior use. Polystyrene white is available.



DisplayFrame's special front loading design is easy to use; contemporary appearance

Durable Top hinge accepts additional signage material

Durable Back Panels - Select hardboard with gloss white dry erase surface, polystyrene or pegboard.

"A" Frame is light in weight yet strong

Plastic end caps are safe for all floors

A Stands are sturdy structures that are light in weight, yet extremely strong. Each GraphicStand comprises of two pairs of aluminum legs that are joined by a patented top sign hinge. This unique hinge has a “sign holder” feature that receives additional signage to create an even greater impact.

GraphicStands’ durable scratch resistant endcap “feet” are safe for any floor and leg braces allows the frame to be easily erected and safely locks into place.

+ SIGNAGE

EuroSign™ Components

Frame Profile 4925


Contoured shape made to easily snap onto patented “FlexHinge”. Available in a variety of designer colors and finishes. To customize your Display Frame application, you can mix or match frame and corner colors.

Applications: Frame system can be use to construct poster boards, picture frames, lightboxes, bulletin board and many others.

Features:

Contour shape that creates a professional appearance

Close engineered tolerances creates a firm fit; integral ribs greatly increases the strength of profile without adding weight.

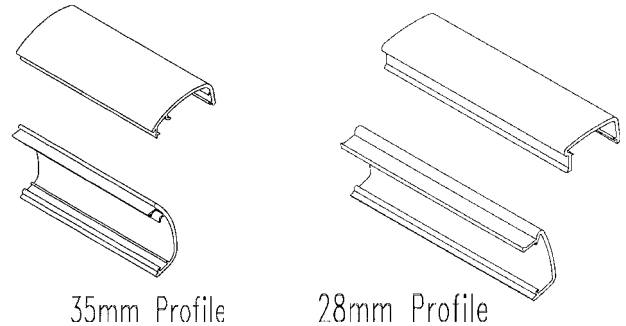


35mm Profile

28mm Profile

Corners 5526


Molded radius corners are made to insert into Frame Profiles. The radius “edge” creates a professional appearance and eliminates the costly labor of mitering corners. Designed to insert into Frame Profile to create a radius look of panels.



Corner

FlexHinge 7303


Patented “FlexHinge” is made of polypropylene commercial plastic; tested for years of use. Designed with an extended double ridge, FlexHinge receives Frame profile by simply “snapping” onto hinge. FlexHinge can be attached to almost any substrate. To apply, insert staple, rivet or screw through hinge and into substrate. We recommend two hinges per side up to 20” frame length. For sizes greater than 20” it is recommended an additional hinge for every 10” of frame length.

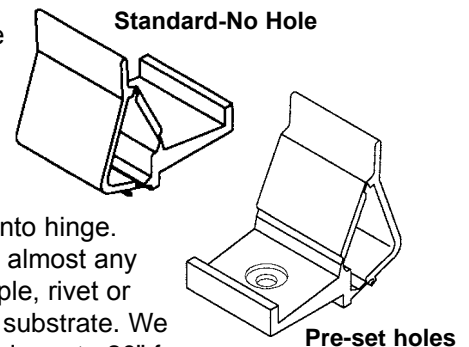

Standard-No Hole

Pre-set holes

“A” Frame Components




A Frame Hinge

Includes “tite-fast” screws (accepts additional signage)


White Backer Panel 1600

1/8”t X 48”W X 96”L

Dry erase gloss or polystyrene (white 2 sides)

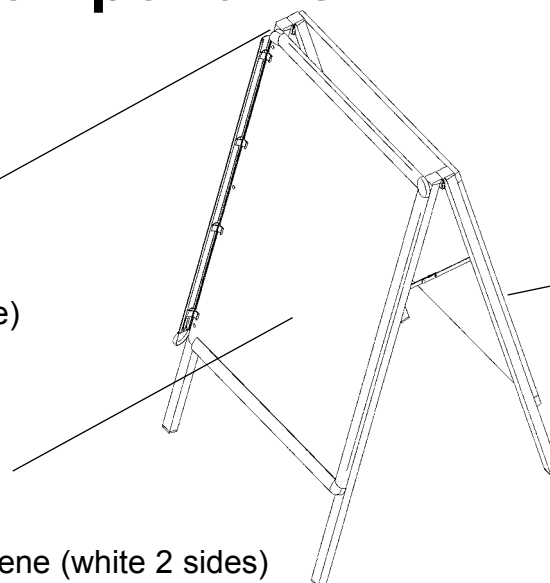

“Legs”
Aluminum Posts 1200
1” X 1 1/4” X 96”
Anodized Finish



End Cap Foot

EuroSign™ Direct Mount Applications

DisplayFrame™ components can address special application, where a “backboard” is not required. Uses can range from creating a “Front loaded” light box to directly mounting “Frames to directly attaching Frames a wall or a fixture.



To mount Frame to wall or Fixture, Walls+Forms™ offers, “flex-hinge” with pre-set holes. The holes are designed for a screw to be inserted through the hinge and onto the substrate.

Attaching Frame to Hinge

1. Be sure front of hinge fits behind front rail on frame profile.


2. Rotate frame profile towards back of hinge. Push frame profile until back rail snaps over hook on back of hinge.

In most cases you will hear a “Snap” when the frame profile engages the hinge.

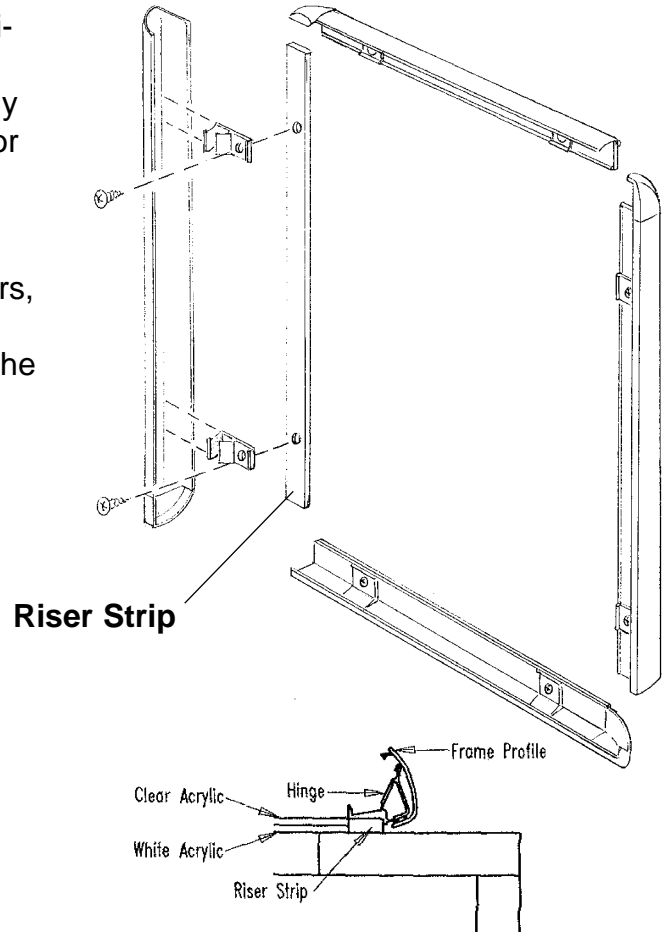

Special Graphic Applications

For special applications where a 1/8” up to a 1/4” graphic material is used, a special “Riser Strip” is pre applied to the “Flex-Hinge”. Riser Strips can be used in Light box applications in which the graphic material is sandwich between two sheets of acrylic. To applied “Riser Strips”, Strips can be held onto the substrate with double-sided tape. Screws are insert through the spacer Strip’s pre-drilled holes.

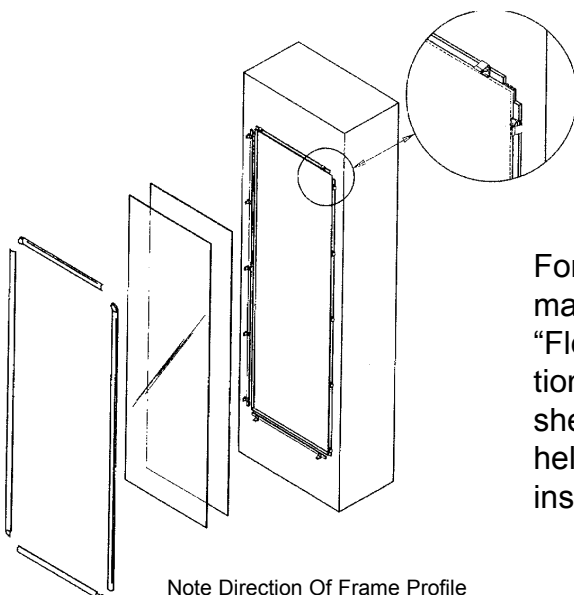

Note Direction Of Frame Profile

+ SIGNAGE

EuroSign™ Graphic Holders

GraphicHolder - #150

"featuring Grip Strip"




The profiles contoured shape will enhance any sign application & is designed for ceiling or wall. The GraphicHolder's patented "Grip Strip" holds sign material securely & safely up to .08" thick.

Ideal designed for wider graphics in which longer spans between "hangers" are required.

Dimension: 96" (length) x 1-1/2" (nominal height)
Specify the length required; price is based on 96" yield.

Colors:

Standard: white & black
other colors are available

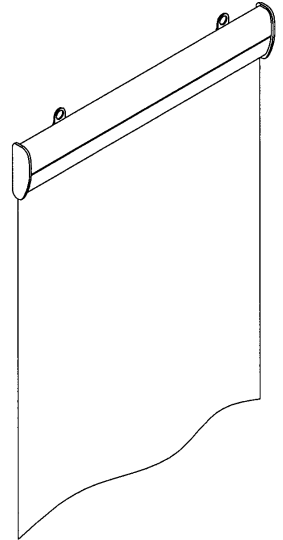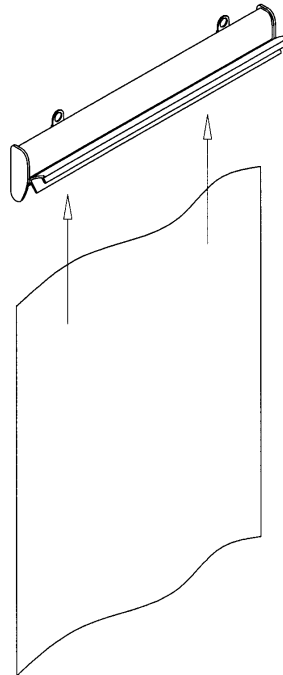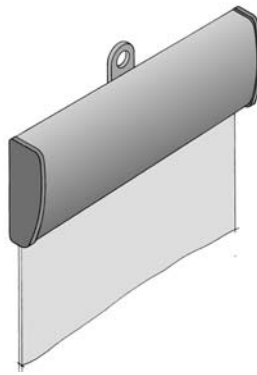

GraphicHolder - #75




"featuring Grip Strip" Slender in appearance, this graphic "workhorse" was engineered for quick sign change & years of use. It features, "Grip Strip", the patented co-extrusion, that holds sign material securely & safely up to .04" in thick.

Designed for ceiling & wall applications.

Dimension: 96" (length) x 3/4" (nominal height)
Specify the length required "there is no cutting charge"; price is based on 96" yield.

Colors:

white, black & clear

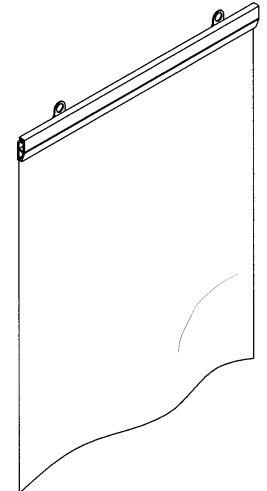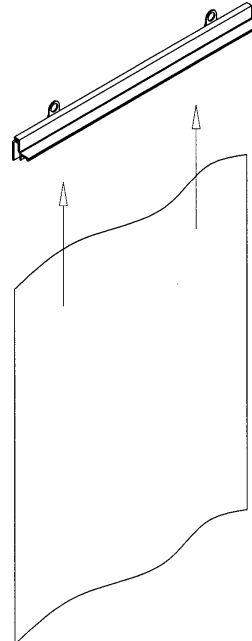

Hanger Hooks 150 and 75

Easy to apply Hooks for use with GraphicHolder # 150 & 75 profiles.

Note: the number of hangers will depend on the specific application. We recommend one hook for each 24" GraphicHolder length.

Wall Mounting Kit


Includes: White or Black Spacer
Screw
Cover Caps

EuroSign™ Graphic Holders


Rail Profile

the graphic track that simplifies graphic placement and “change out”


Specifically designed for the #150 GraphicHolder, the Rail Profile is an easy to use and is a highly functional method of mounting your graphics to a wall or fixture. Flexible in its use, the Rail Profile is a durable plastic “track” that can be fastened to a substrate in single stock or “cut to size” length. Application may vary to a single track with one graphicholder or in multiple tracks placed side by side around an entire store or department.

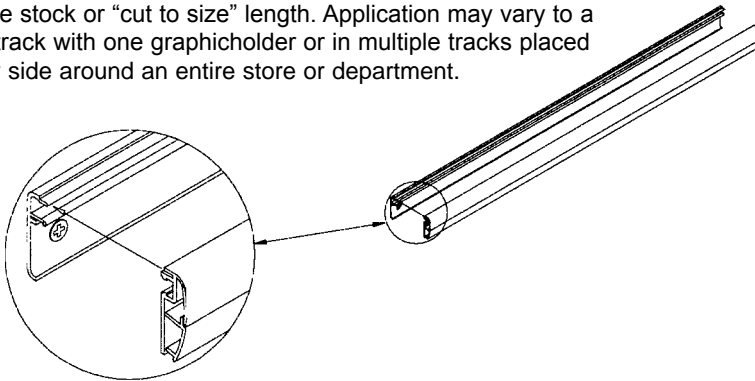

Walls + Forms™ can transform any uneven, poorly planned graphics application into cost effective, professional installation.

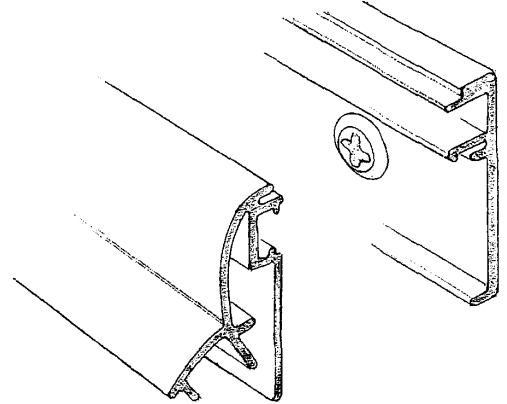


Rail Profile

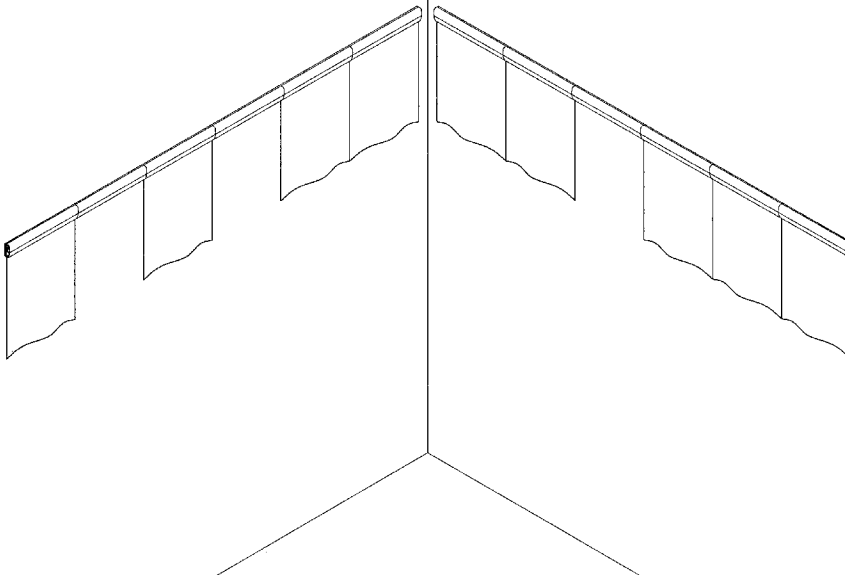

Designed ideally for hanging multiple “In Line” graphics that are required to be frequently “Changed Out” or repositioned.

Also, different graphic sizes are not a problem; just cut the Graphic Holder to the proper Graphic width and mount it any where on the “Rail Profile”. Now, Graphic Material can be independently removed, installed and even repositioned without interfering other Graphics’.


GraphicHolder snaps on the “Rail Profile”, easily and securely. To install, simply fasten the “Rail Profile” on a wall or fixture with standard screws, place graphic material into GraphicHolder and snap the GraphicHolder on to the “Rail Profile”.

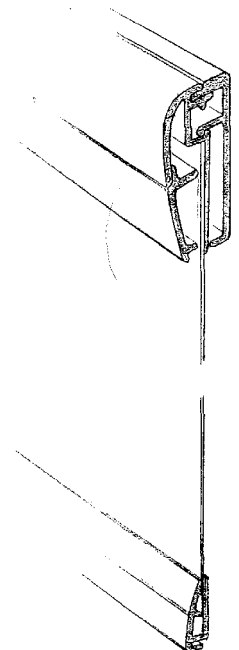


+ FLOOR DISPLAYS

STANDARD DESIGNS


Floor modules are built to last. To lower freight costs and damage, all floor displays are shipped “knock down”. Each unit has been designed for easy and quick assembly. Panels, connectors and bases are manufactured with state of the art equipment and provide a consistent secure fit, even with repeated assembly and assembly. Whether it is one display or a national “rollout”, quality and service are guaranteed.




6006 Triangle
Fixed Base
Rotating Base
UPS/FEDEX Shippable




6002 Cube Unit
Fixed Base
Rotating Base
UPS/FEDEX Shippable

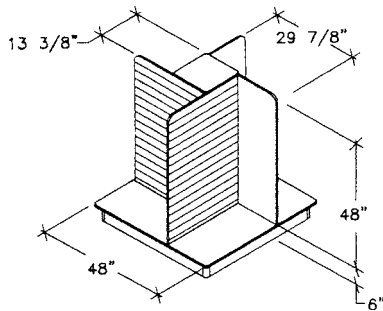


6005 LPL 48" Pinwheel
Fixed Base
Common Carrier Shippable




6006 H Unit
Fixed Base
Rotating Base
UPS/FEDEX Shippable

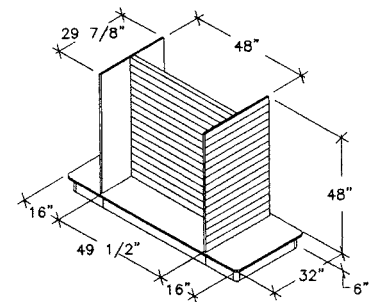


6007 H Gondola
Modular Design
Common Carrier Shippable




4010 Table Top Cube
Rotating Base
20- 3/4" h X 17" W




3901 Table Top Unit
Fixed Base




4016 Table Top
Rotating Base




4002 Triangle
48" h X 16" W x 16" d




6003 Pinwheel
Fixed Base
Rotating Base
UPS/FEDEX Shippable



6026 H Gondola
Optional Casters
Common Carrier Shippable




4009 Cube
With Platform Base




4001 Cube
60" h X 16" W x 16" d


+ FLOOR DISPLAY IDEAS

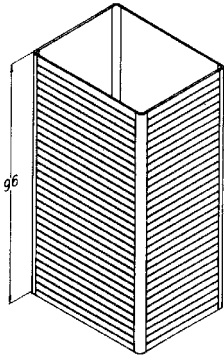


CUBE
AFD-0048




TRIANGLE
FD-0063

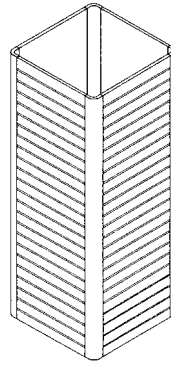


CUBE
FD-0057

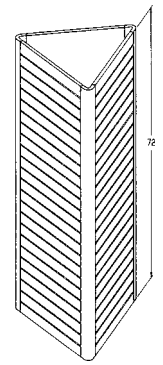


TRIANGLE
FD-0059

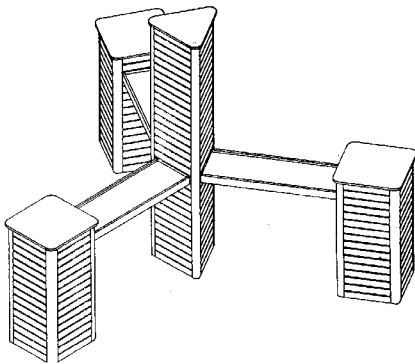


CLUSTER
FD-0012A

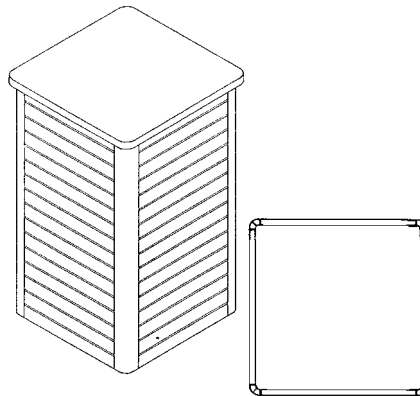


CUBE
FD-0058

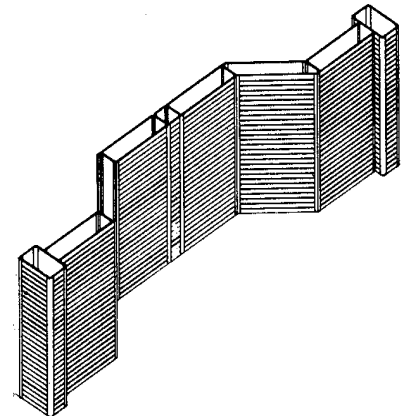


CUBE
FD-0060

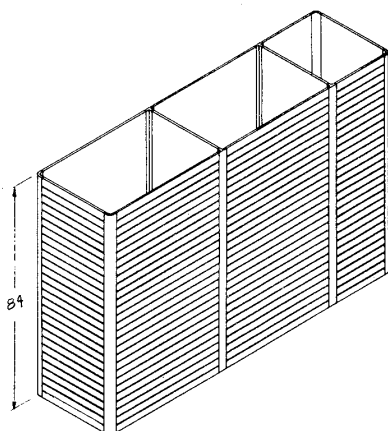

RECTANGLE
FD-0022

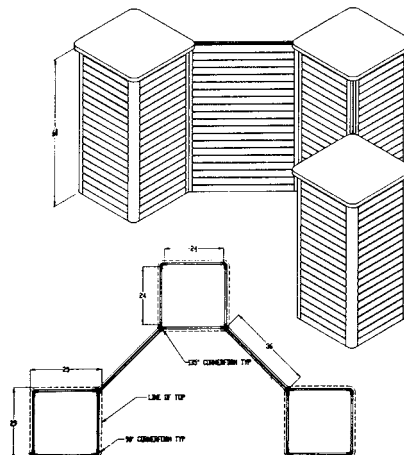


CLUSTER
FD-0012

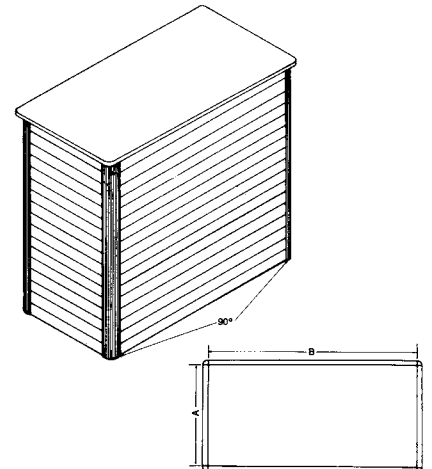


RECTANGLE
FD-0014


+ FLOOR DISPLAY IDEAS

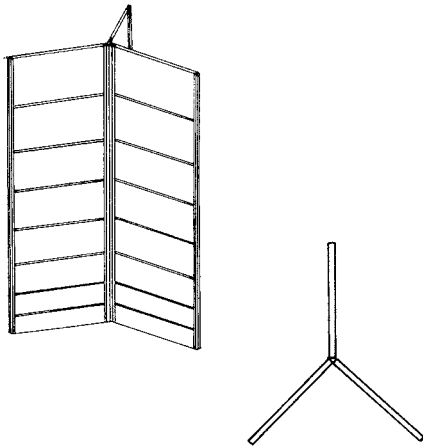


Y UNIT
FD-0043

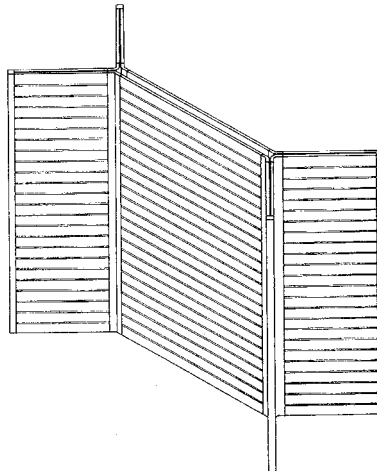


DOUBLE Y
FD-0021

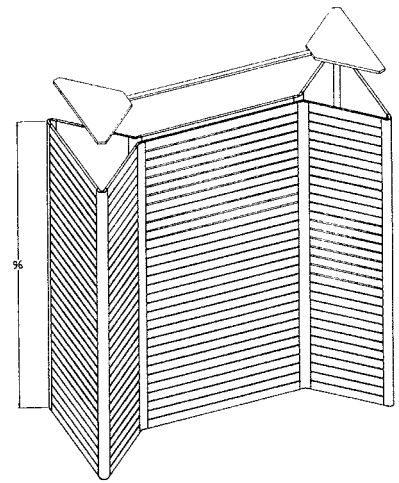


HOUR GLASS
FD-0029

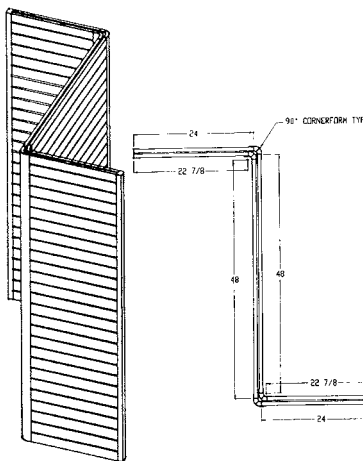


Z FLOOR UNIT
AFD-0021

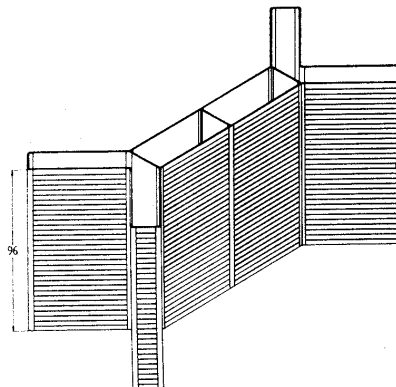


DOUBLE Y
AFD-0074

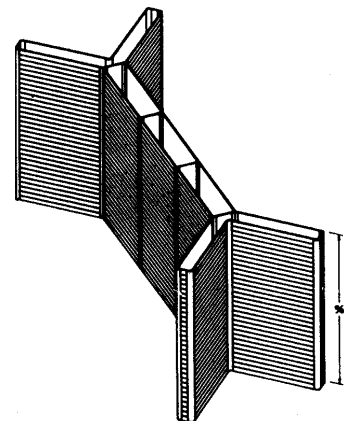


DOUBLE Y
AFD-0096




Y-UNIT
AFD-0110




Y-UNIT
FD-0032




Y-UNIT
FD-0031




Y-UNIT
FD-0033

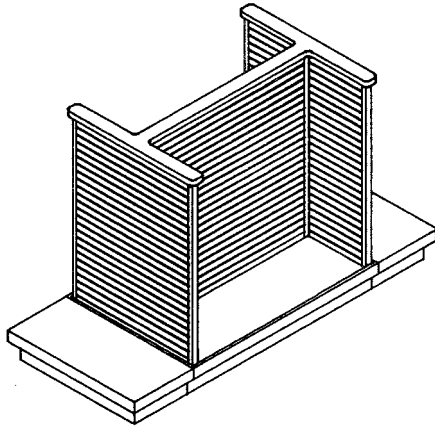


H DISPLAY
FD-0080

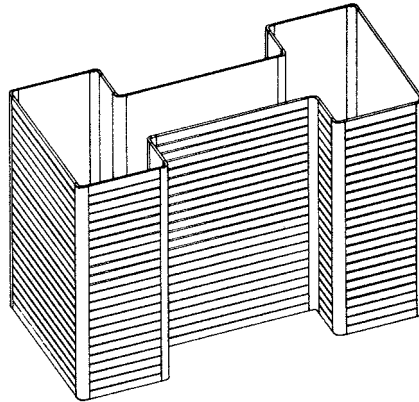


HOLLOW H UNIT
FD-0061

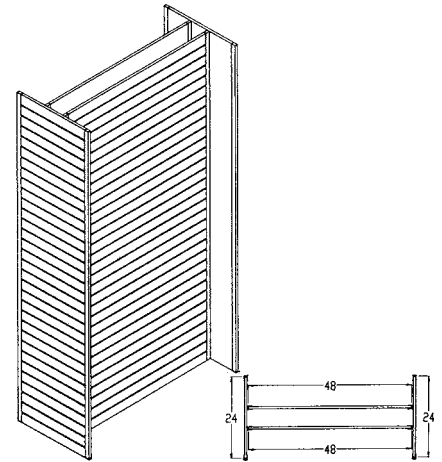


H DISPLAY B
FD-0069




AFD-0031




AFD-0004




AFD-0060




AFD-0011

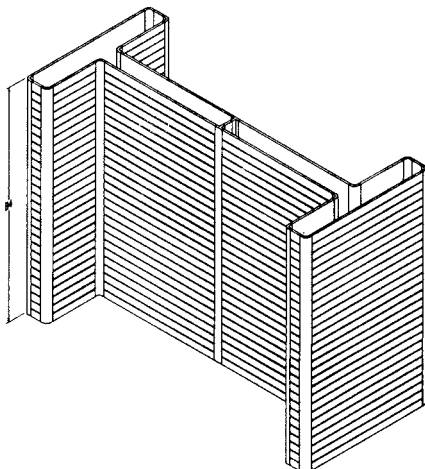

DOUBLE H
FD-0001

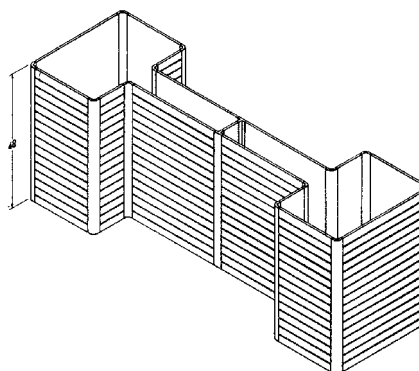


HOLLOW H
FD-0034

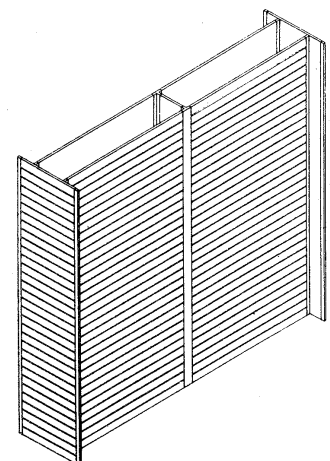


H DISPLAY
FD-0068


+ FLOOR DISPLAY IDEAS

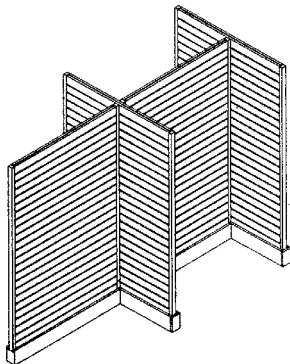


DOUBLE T UNIT
WFFD-0115A




FLOOR DISPLAY
WFFD-0056




WALL DISPLAY
AFD-0041




X DISPLAY
FD-0052

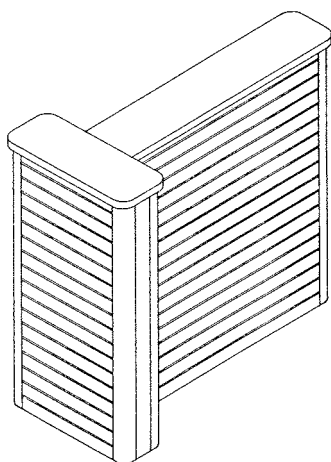


HOLLOW T
AFD-0010

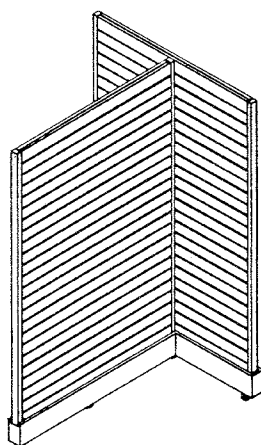


T UNIT
AFD-0115




FLOOR DISPLAY
WFFD-0051




T DISPLAY
AFD-0052

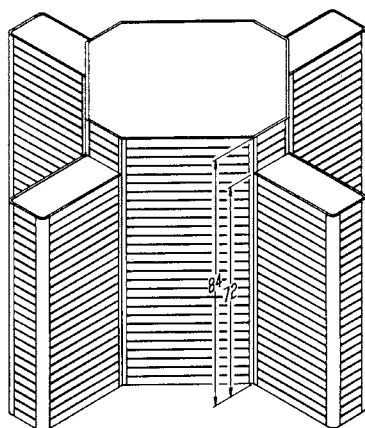

X DISPLAY
AFD-0007







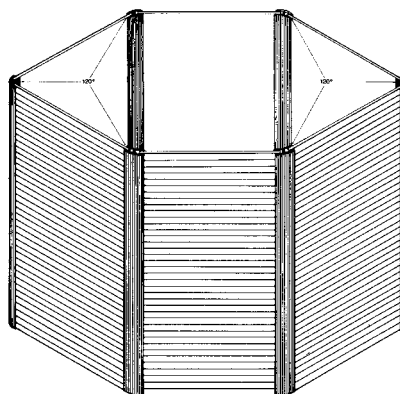


HEXAGONAL MODULE
FD-0074



X DISPLAY
AFD-0006


+ PERIMETER & GRID IDEAS

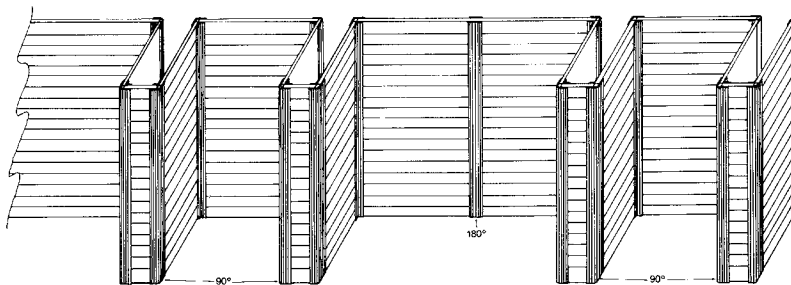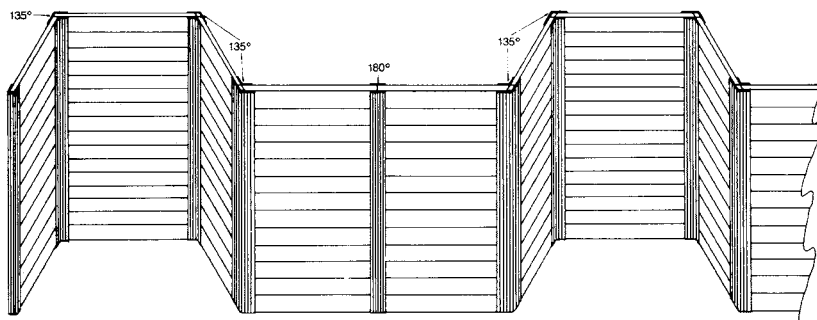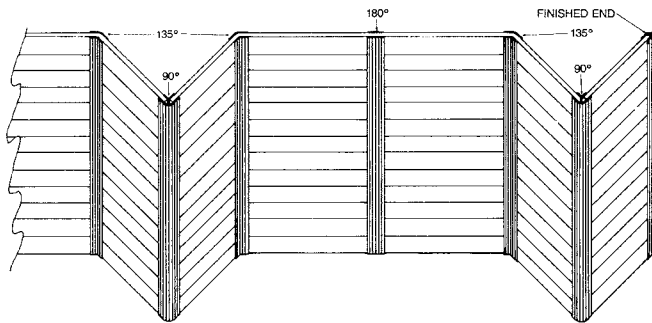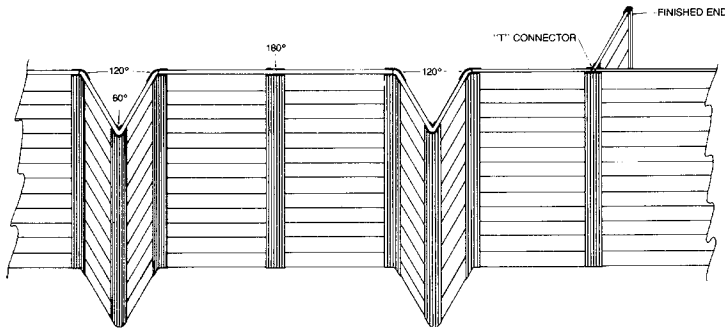


+ PERIMETER & PARTITION WALLS

Perimeter & Freestanding Displays


Inspired by the need for low cost method of construction, our Perimeter Wall and Freestanding Fixture concepts are ideally suited for the ever changing retail market. Units are made up of four basic elements: Walls + Forms™ fastening profiles, pre-finished panels, “top caps” and furniture elements, such as counters, cabinets, shelves and tables. Lighting & Signage are optional. Walls + Forms™ Freestanding Displays have been used by many of the leading product manufacturers and fixture designers throughout the years. Many of the displays create the perfect vehicle for presenting clothing, footwear, home furnishing, decorative hardware, furniture and hardware. The versatility of the modular construction allows a variety of products to be merchandised effectively and inexpensively. The modular freestanding structures can provide a low cost approach in creating additional merchandising space, as well as, a visual border among product lines and departments. All Walls + Forms™ fixture ideas are available with drawings & specifications.







**WING WALL
MPS-2**

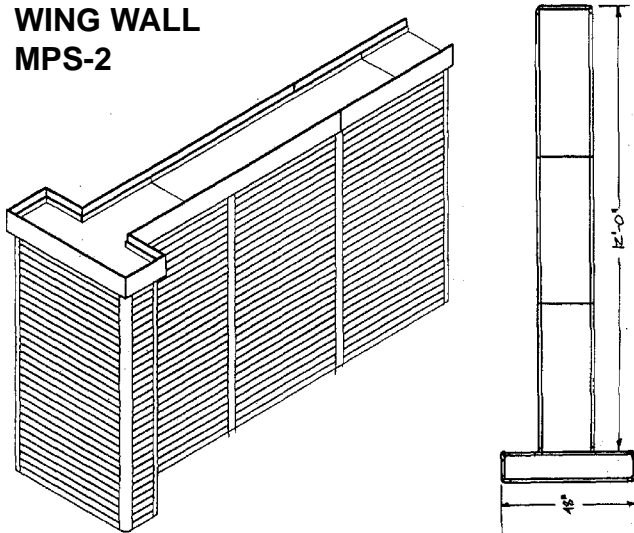



**T DIVIDER
MPS-3**

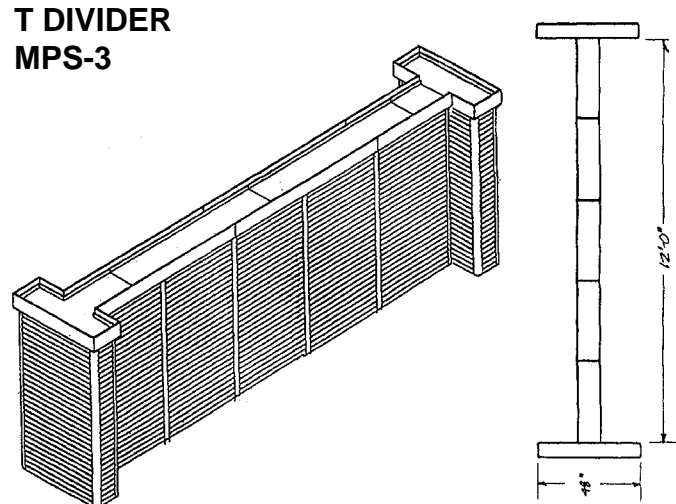



PERIMETER AND EXHIBIT LAYOUTS

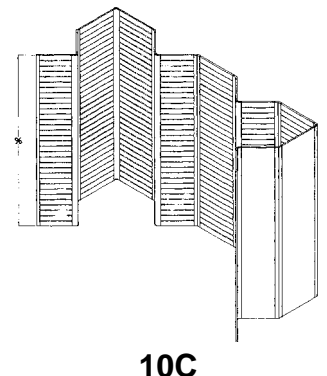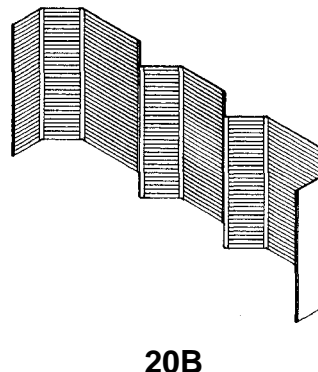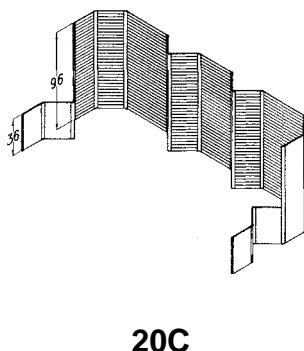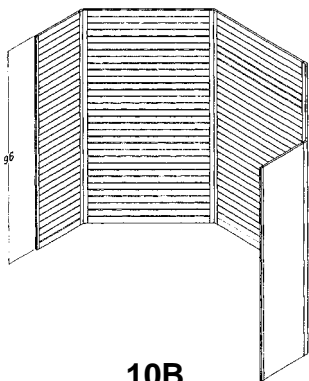



**3 SIDED
MBL-3**







**4 SIDED B
MBL-4B**





MLB-2

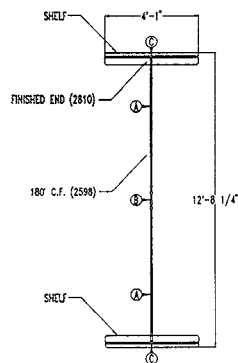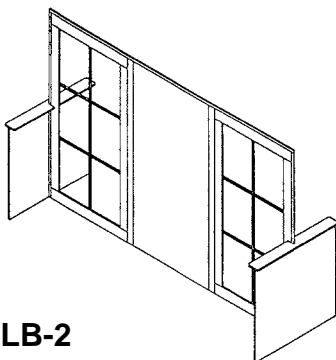


**4 SIDED A
MBL-4B**

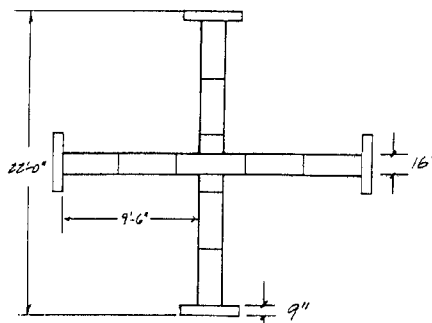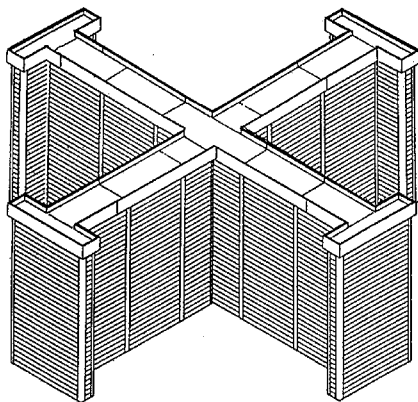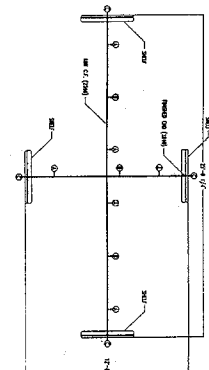


CROSS DIVIDER MPS-4

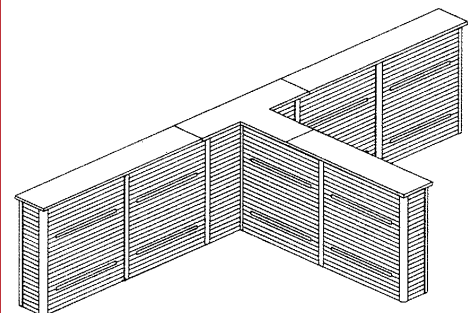


10D



10E




10A



20A

+ MODULAR DOOR AND PANEL SYSTEMS


Modular Door + Panel system



Walls + Forms™ Modular Door + Panel System offers retailers, exhibit builders and contractors a low cost, easy to install and easy to configure method of constructing fitting rooms, storage areas, meeting rooms, and modular offices. This system is the best alternative to the delays and construction mess of traditional construction and inflexibility of pre-engineered Panels Systems. The Walls + Forms™ Door and panel systems designed to be simple to understand and completely adaptable using plastic or aluminum panel connectors; wood or plastic panels and a variety of accessories; including mirrors, benches, garment hooks, metal standards and more. Each component is designed to address a many diverse applications and built to stand the harshest retail conditions.

To plan your “layout design”, simply refer to the following pages for the product or component that best suits your needs, or contact our customer service department for many more designs. Our engineering department is available to recommend the appropriate connectors and panels that would suit your application. If you have a unique configuration, we can assist you with customized designs complete with material specifications and cost estimates.

- No framing or drywalling
- easy to assemble, disassemble, and reassemble
- snaps together in minutes
- pre-hung doors
- pre-machined lock sets
- No quantity minimum on standard designs, readily available
- variety of options available’ doors, hardware, and accessories
- ADA Design available

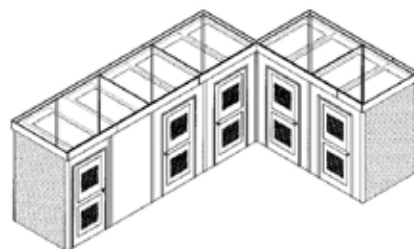

Walls + Forms™ Door panel is a cost effective way of creating a professional door for fitting rooms, exhibit booths, storage areas, temporary retail fixtures & more.

Door Type:

Hollow core - hardboard faces - brown

Full louver door - raw surface

Door Panel:

Standard surfaces:


-LPL (low pressure plastic laminate) colors are white, almond, grey & hard rock maple

-HFL (high pressure plastic laminate) vertical grade. Colors, patterns & wood grain patterns, Major domestic laminate manufacturers, such as WilsonArt, Formica, Nevamar, Pionite & others brands


Door Size:

Description	Opening Size	Actual Cutout Size
2/0 x 6/8	24”(w) x 80”(h)	25-5/8(w) x 81-5/8” (h)
3/0 x 8/8	38”(w) x 80”(h)	37-5/8”(w) X 81-5/8(H)

For fabrication instructions, such as “cutout dimensions” & finishing ideas, please contact customer services department.



Door + Panel Hardware

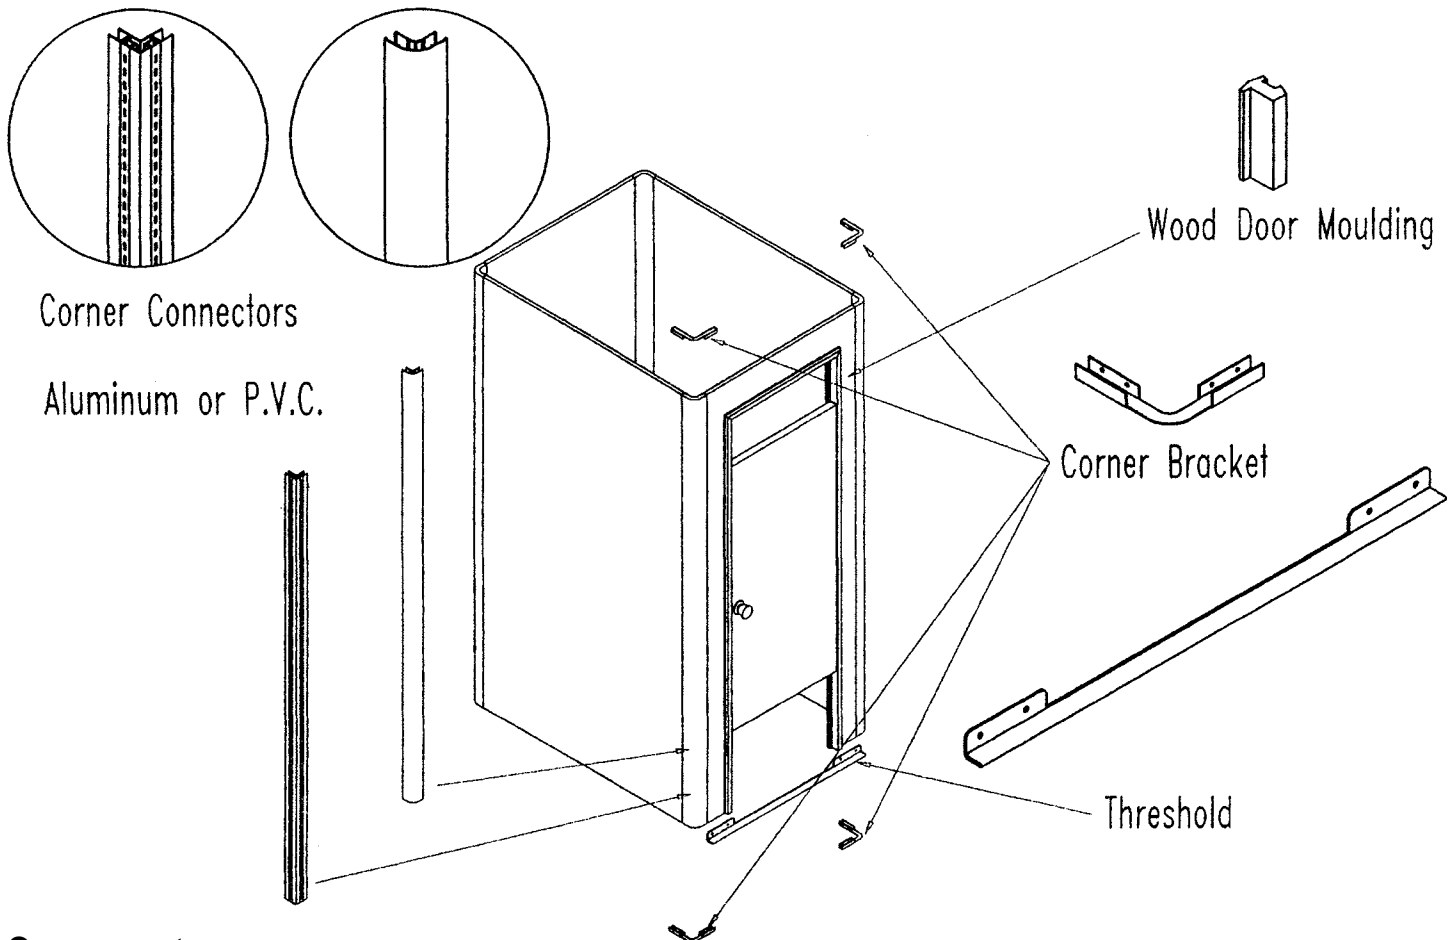

Components:
Consists of.

Connectors:

CornerForms™ (see CornerForms for product #) - two part fastenings system that allows "lateral panel assembly. Angles are 90 Degree, T-Connectors, 4 Ways & more Aluminum Panels Posts - mechanically connects panels with screw fastening. Posts feature metal vertical slotted standards that received standard shelf & other brackets. Angles are 90 Degree & T- Connector

Wood Door Moulding


commercial grade Popular moulding is designed to be attached to edge of "cutout opening" of 3/4" thick pane. Once opening has been 'framed' a variety of 1 3/8" thick hollow core or louver doors can be mounted utilizing "standard surface mounted" type of hinge.

Corner Bracket is designed to maintain panel at a 90 Degree corner. Corner Bracket is to be mounted to bottom edge of panel corner C connection.

Threshold - Metal Door threshold mounts to the bottom of door opening. It creates the proper opening width to maintain space for a "smooth" door swing.

+ PRIVACY ROOMS

Wall Mounted & Freestanding Fitting Rooms



Starter and Adder

A "Starter" is a single free standing or wall mounted fitting room unit. It is also the first unit assembled progressively in a line of consecutive fitting room units. These consecutive (additional) units are referred to as "Adders".

Standard Specifications

Panels

Type: 3/4" wood composite solid substrate. All vertical edges have aluminum reinforcements.

Dimensions: Regular 96"H X 48"W X 48"D - Door opening is 80"H X 24"W
Large 96"H X 60"W X 60"D - Door opening is 80"H X 36"W
ADA 96"H X 60"W X 88"D - Door opening is 80"H X 36"W

Finish: Commercial Grade Melamine Laminate; Exterior & Interior surfaces are

Color: White, Gray, and Almond.

Doors

Type: Full hollow core; 2' X 3" wide X 6' 8" high. Unfinished surface hardboard. Door is 1 1/3" thick ADA requires 3' wide doors on all applications, paint ready hardboard, unfinished door moulding. Full size door available.

Door Swing: Left hand - Outswing. All fitting room in a series have same swing.

Hardware



Hinges: Commercial mortised "Spring" hinge upper and "Swing" hinge lower with brass finish.

Locksets: Privacy and Handicap Lockset with polished brass finish.

Wall Mounted & Freestanding Fitting Rooms



Starter Unit Consists of:

- 2 Wall Panels
- 1 Door Panel with Pre hung Door
- 2 90 Degree Connecting Profiles
- 2 Wall Mount Channels
- 1 Screw Packet

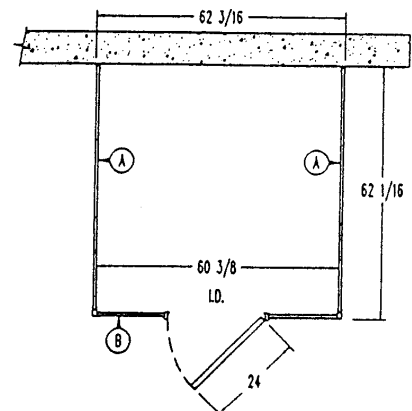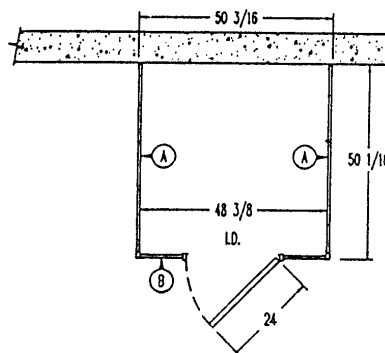

Adder Unit Consists of:



- 1 Wall Panels
- 1 Door Panel with Pre hung Door
- 2 "T" Connecting Profiles
- 1 Wall Channel Connecting Profile
- 1 Screw Packet
- 1 90 Degree Connecting Profiles

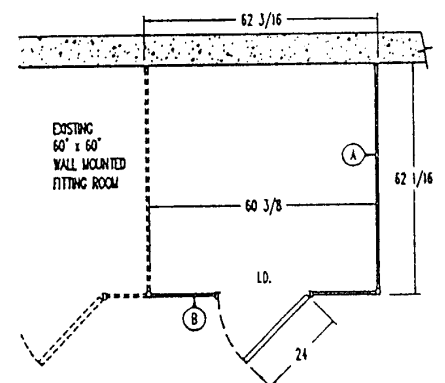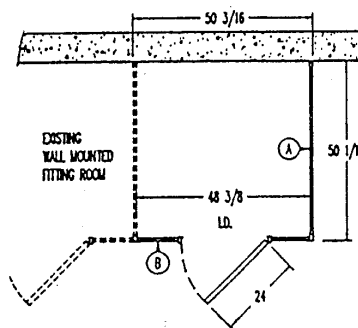

ADA "Handicap" Wall Mounted Fitting Rooms



Starter Unit Consists of:

- 2 Wall Panels
- 1 Door Panel with Pre hung Door
- 2 Extension Wall Panels
- 2 Straight Connecting Profiles
- 2 90 Degree Connecting Profiles
- 2 Wall Channel Connecting Profiles
- 1 Screw Packet
- 1 ADA Bench

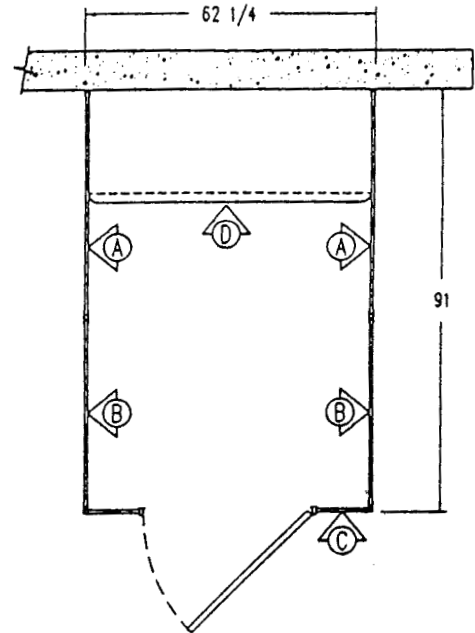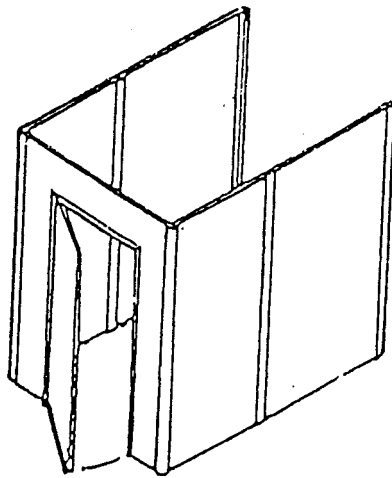

Adder Unit Consists of:

- 1 Wall Panels
- 1 Door Panel with Pre hung Door
- 2 "T" Connecting Profiles
- 1 Wall Channel Connecting
- 1 Screw Packet
- 1 90 Degree Connecting Profiles

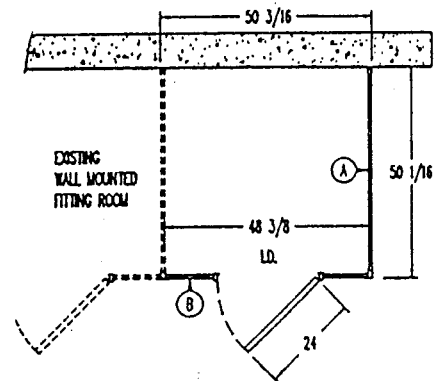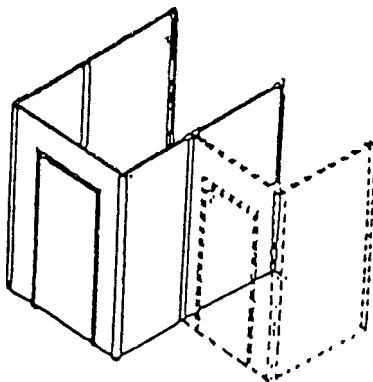



+ PRIVACY ROOMS

Freestanding Fitting Rooms

ADA Handicap

Starter Unit Consists of:



- 3 Wall Panels
- 1 Door Panel with Pre-hung Door
- 2 Extension Wall Panels
- 2 Straight Connecting Profiles
- 4 90 Degree Connecting Profiles
- 1 ADA Bench

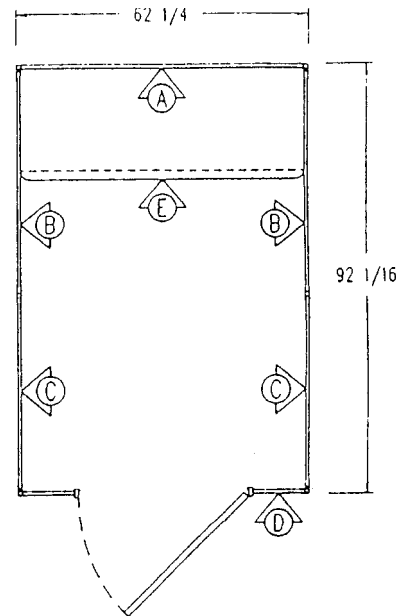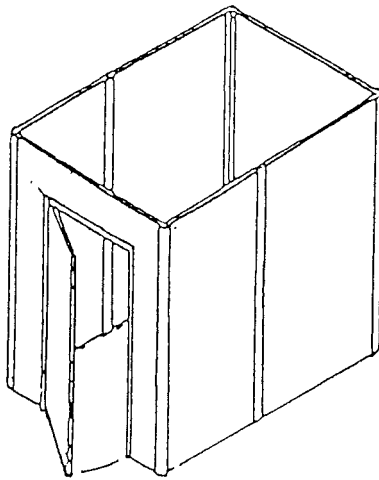

FR1500

Adder Unit Consists of:

- 1 Wall Panels
- 1 Divider Panel
- 1 Door Panel with Pre hung Door
- 2 "T" Connecting Profiles
- 2 90 Degree Connecting Profiles

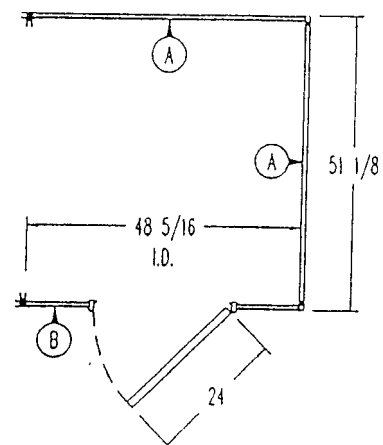
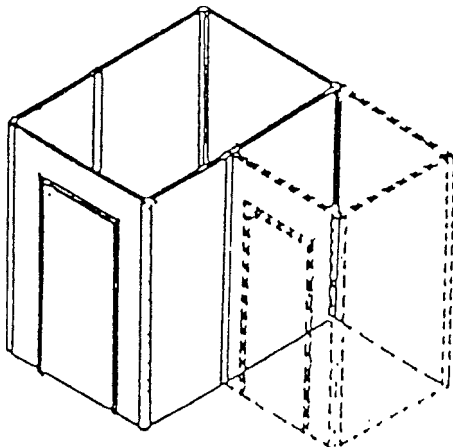


FR1150

Freestanding Fitting Rooms




Starter Unit Consists of:

- 3 Wall Panels
- 1 Door Panel with Pre hung Door
- 4 90 Degree Connecting Profiles

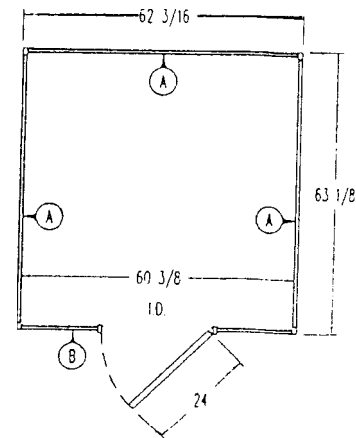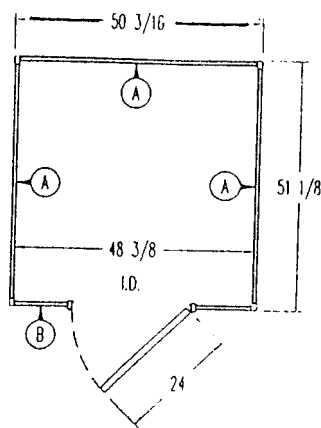

Adder Unit Consists of:

- 1 Wall Panels
- 1 Divider Panel
- 1 Door Panel with Pre hung Door
- 2 "T" Connecting Profiles
- 2 90 Degree Connecting Profiles

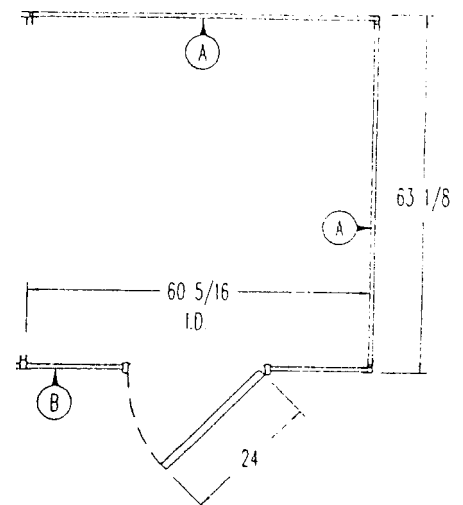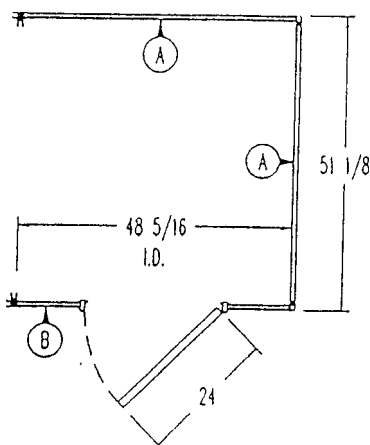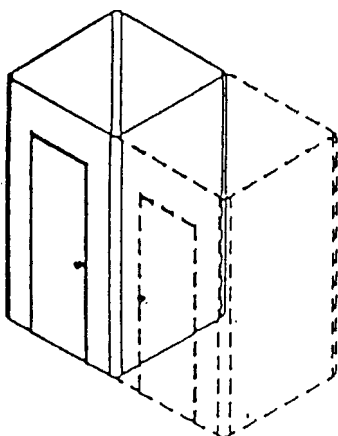

+ COUNTER SYSTEMS

Module Counters

Features:

Each counter has been designed and manufactured with the retailer's aesthetics, structural and functional requirements in mind. Based on European cabinetry techniques combined with "Good Old American Know How", slot-fit and pre-assembled counters designs are made to meet the demands of today's commercial environment.


Slot-fit is a user friendly method of Ready To Assemble. Unlike traditional construction, our counters can be shipped "knock down" to greatly lessen freight costs and damage. Each panel,

FEATURES:


- Breakaway Slot Fit modular construction is very easy to assemble. Only simple tools are needed.
- Quick availability. No minimum quantities required
- Select from Four "Ready to Ship" colors: white, black, gray & almond. Countertops are all domestic high pressure laminate. Select from any standard matte finish. Durable commercial grade construction.
- Ships "Knock down" to lower freight cost and lessen damage.
- Modular design permits easy to order "adder" or replacement parts.
- Easy to relocate within store or to another site.
- Durable raised platform design elevates counter off of floor for efficient wire containment and additional safety.
- For safety and durability, all corners on counter top, counter sides and platform are radiuses and protected plastic edges.

Optional Features Include:

- Retractable keyboard tray - "Pullout" printer shelf - Adjustable "all purpose" shelves - Optional "transaction ledge" - Easy to remove design.

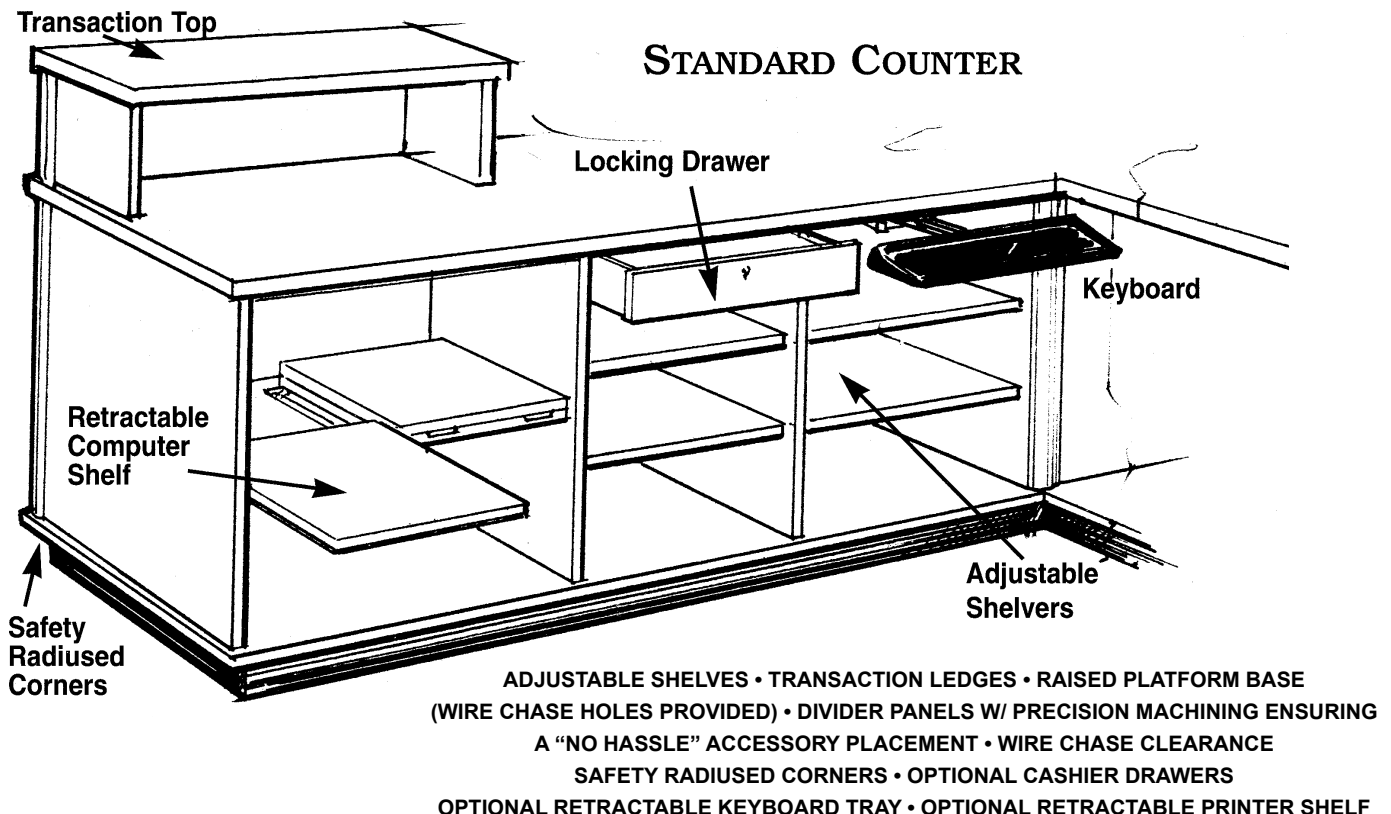


MODULAR COUNTERS - SERIES NO. 2000

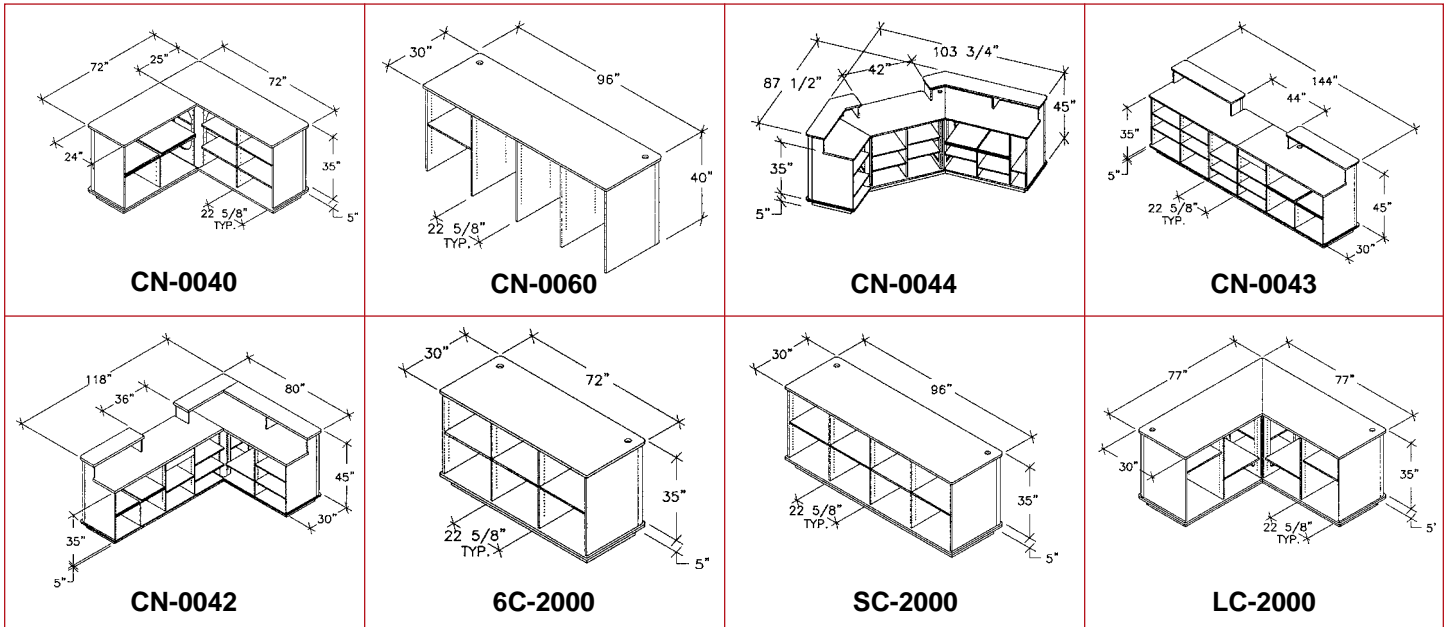


No Tools . . . Quick n' Clean Assembly!

Slot Fit is a unique construction method that allows for a quick, clean assembly. Unlike traditional construction, our counters can be shipped "knock down" to greatly lessen freight costs and damage. Each panel, side and back, has a "tab" feature machined on top and bottom of each panel. The "tab" fits into a corresponding slot in the base and countertop to establish a secure assembly without mechanical hardware.





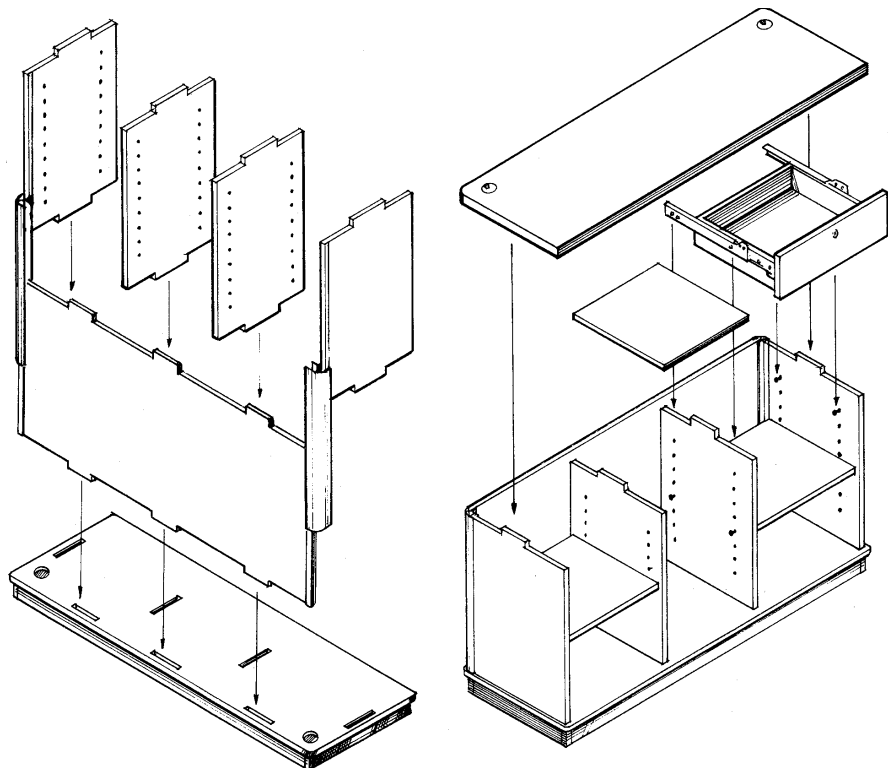


+ MODULAR & TEMPORARY FIXTURE IDEAS

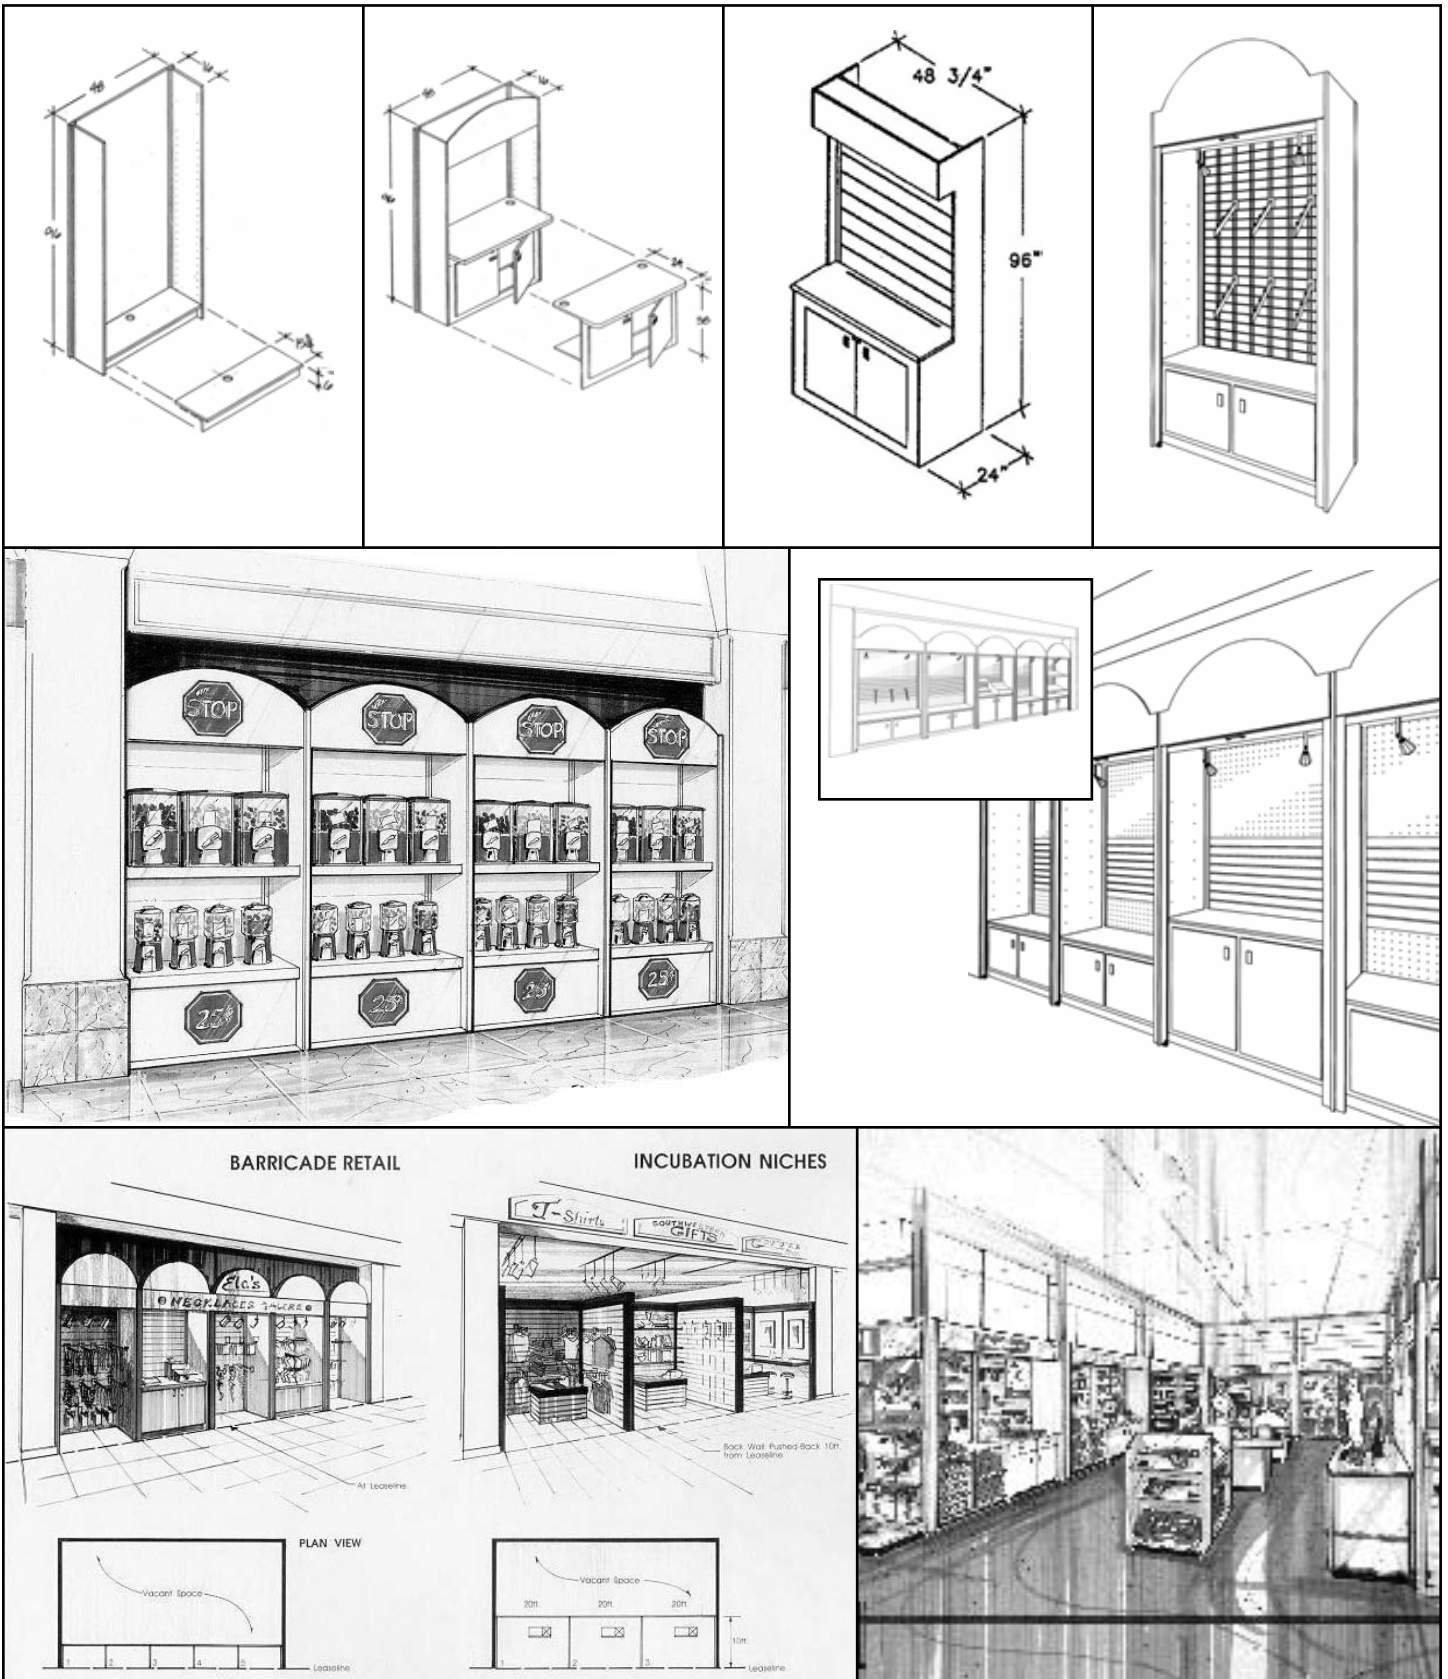


Store Fixture






New Concept In Display Engineering

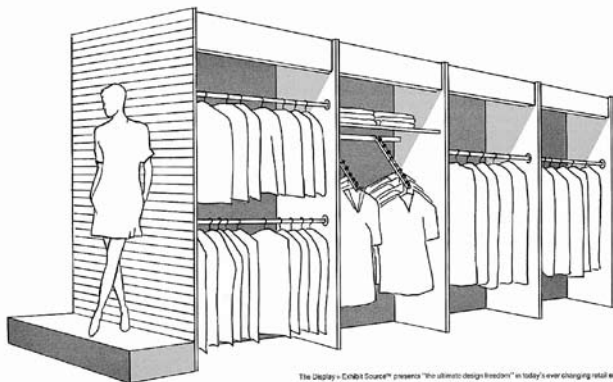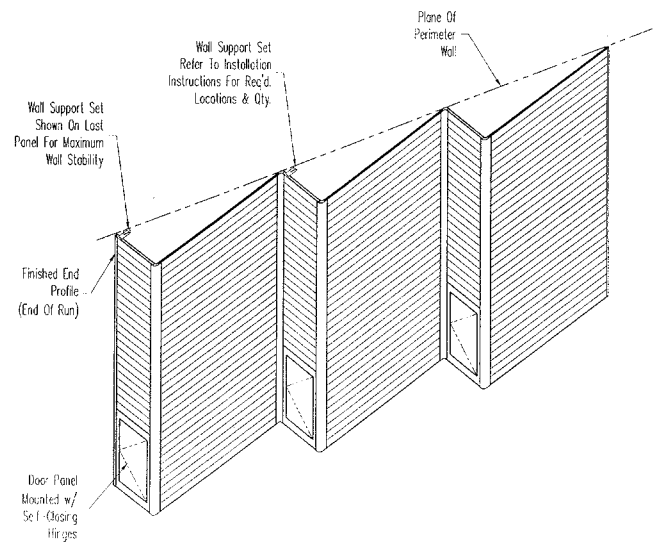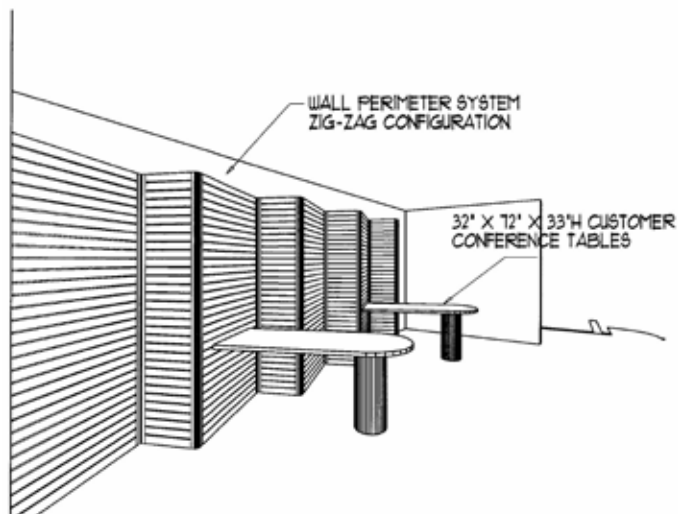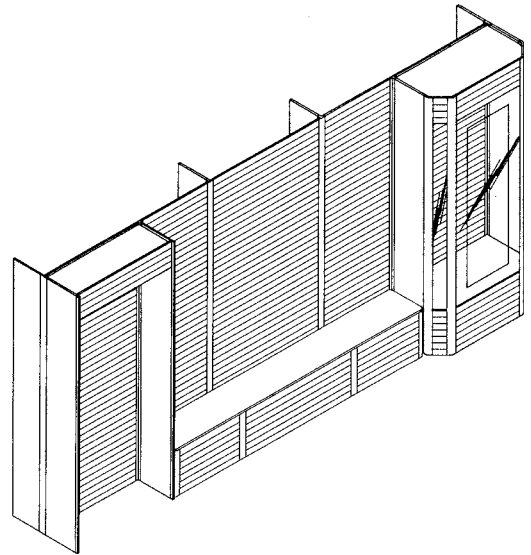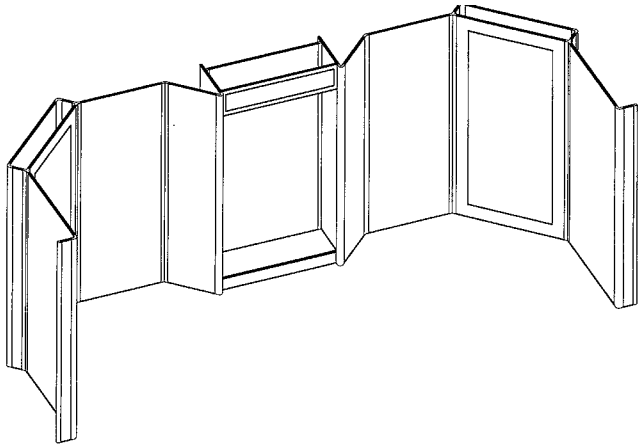


The Display + Exhibit Source™ presents "the ultimate design freedom" in today's ever-changing retail environment. Our process includes hundreds of panel options and finishes as well as custom fabricated wood, metal and plastic components that can be assembled or reconfigured in a matter of hours, even by store personnel. The building components give you the flexibility to create custom floor and perimeter wall displays at a fraction of the cost of other systems.

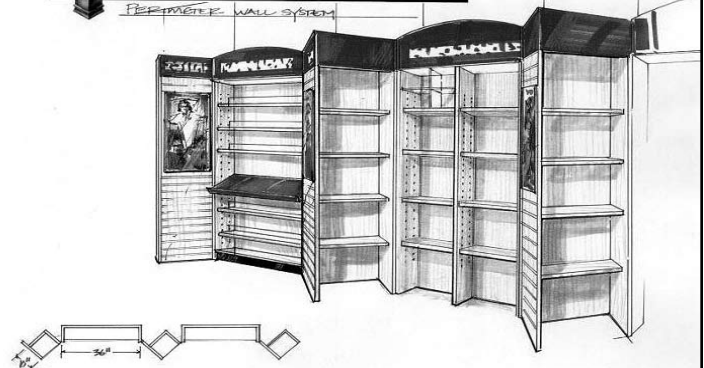

+ MODULAR & TEMPORARY FIXTURE IDEAS

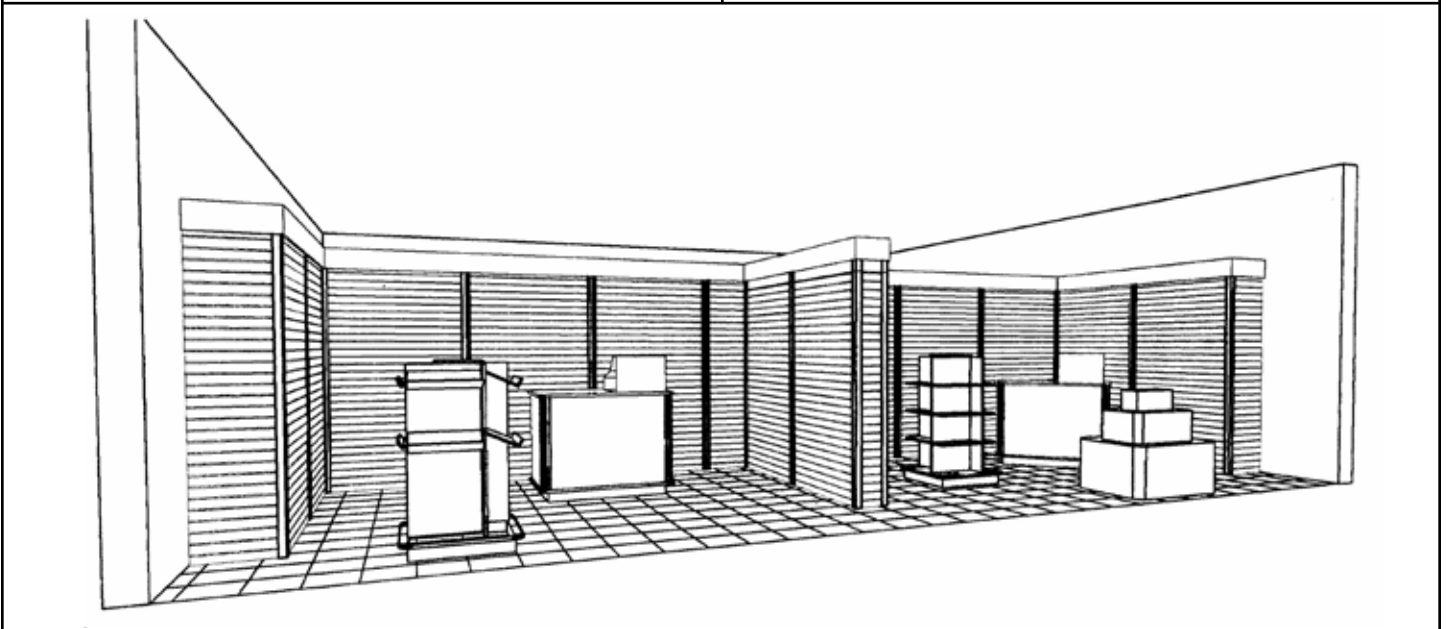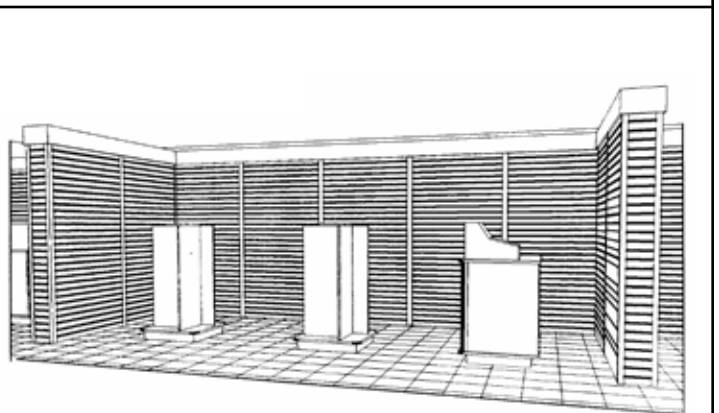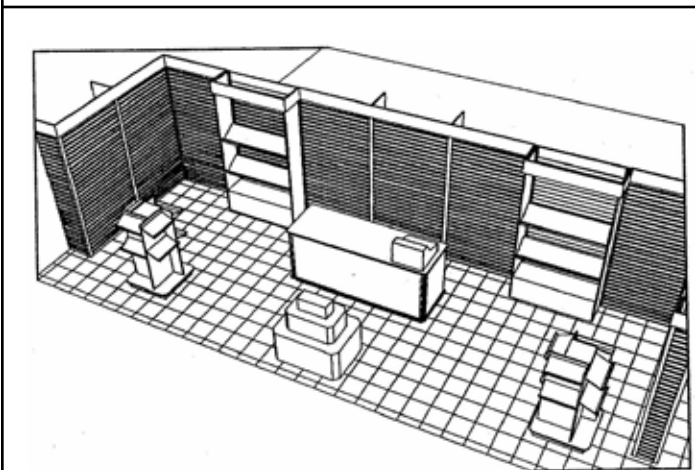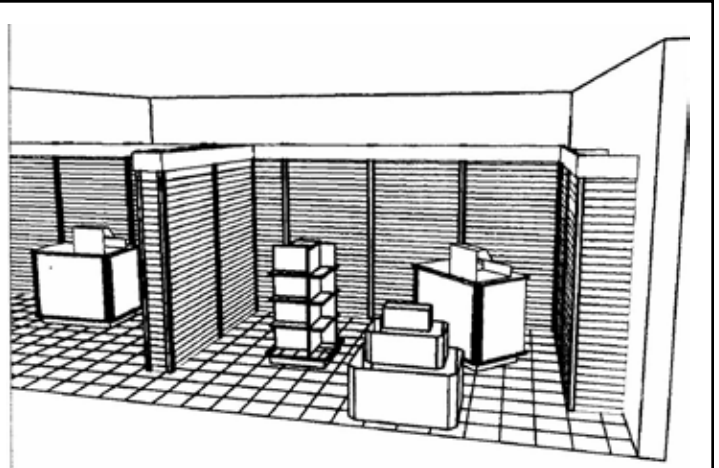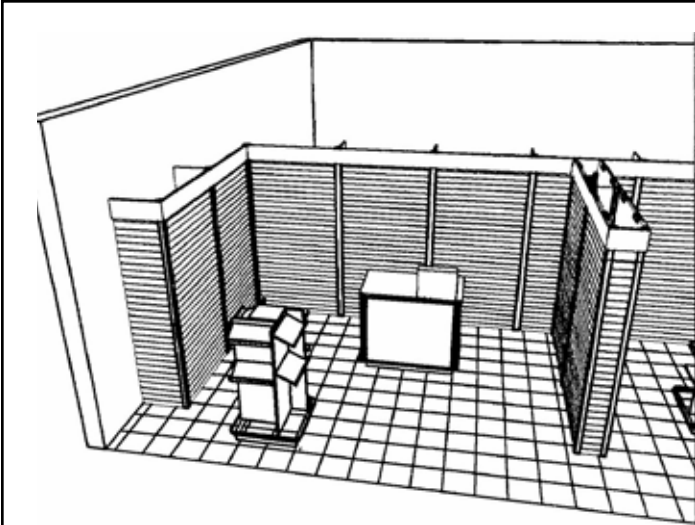

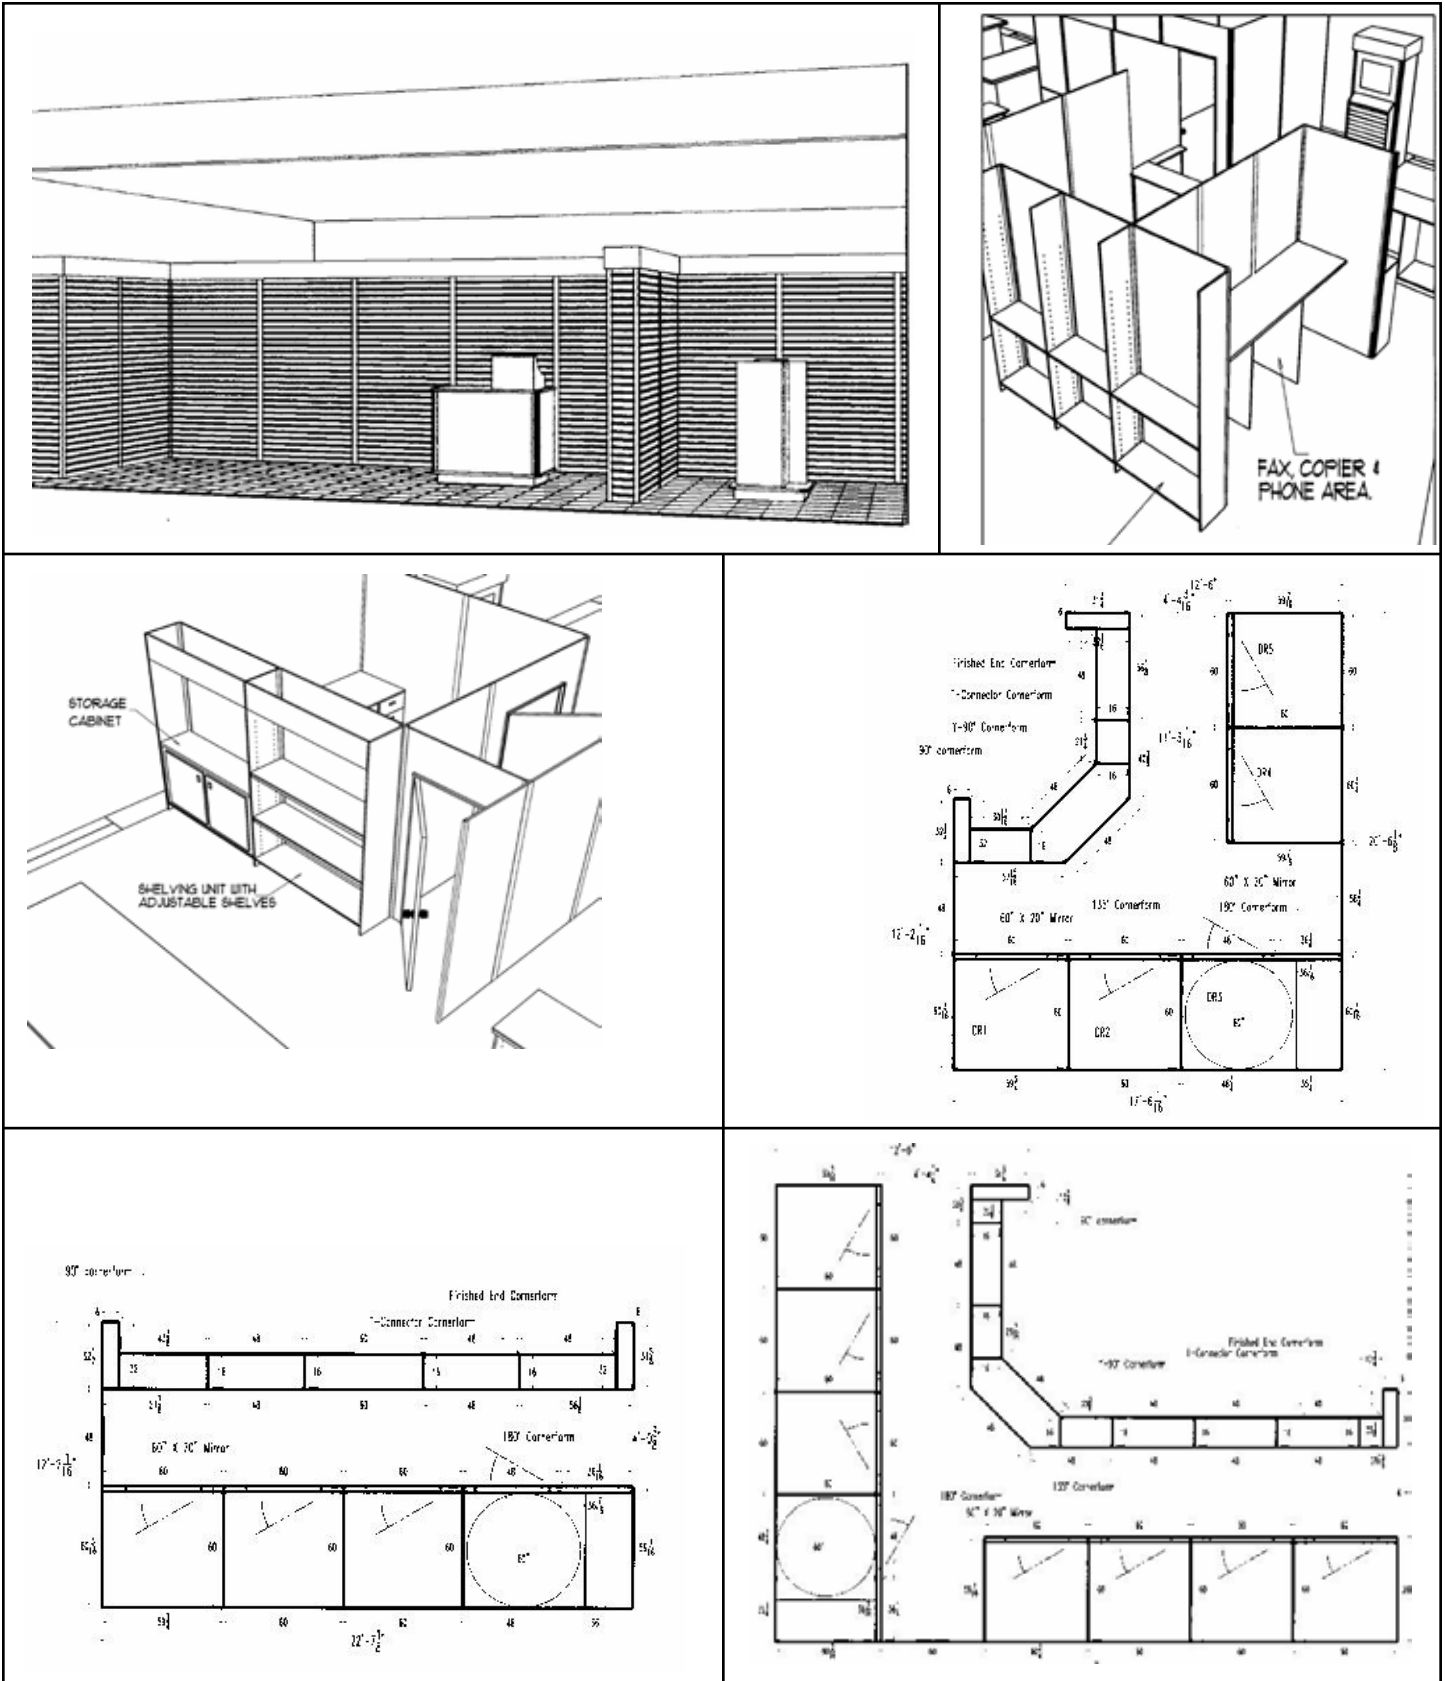

NEW CONCEPTS IN DISPLAY ENGINEERING



Products for Retail



www.wallsforms.com | info@wallsforms.com

Walls+Forms, Inc.
P.O. Box 741112
Dallas, Texas 75374-1112

P. 972.745.0800 | F. 972.304.8402

Store Fixturing | P.O.P. | Signage | Components | Showroom | Custom